# **GLASHÜTTE LIMBURG**

### Product data sheet

## Ceiling and wall luminaire

**IP 44** 

50114

Project · Reference number

Date

#### Application


Celling and wall luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks in interior applications.

They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class.

#### **Product description**

Metal housing, finish white enamel Hand-blown opal glass, satin matt, with sliding-bolt closure 2 fixing holes ø 5.5 mm 240 mm spacing 2 cable entries for through-wiring for mains cable up to ø 10.5 mm max.  $3 \times 1.5^{\circ}$ Connecting terminal 2.5 Earth conductor connection Lampholder E 27 Safety class I Protection class IP 44 Protected against granular foreign bodies > 1 mm and splash water **C €** – Conformity mark Weight: 2.7 kg



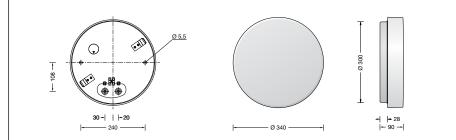

#### Lamp

Luminaire with lampholder E 27 Lamp wattage max. 2 x 75 W

2 High voltage tungsten halogen lamps QA 55  $\cdot$  E 27

Osram: Halogen Eco Classic A 57 W 915 lm Philips: Eco Classic A 53 W 850 lm

Please note the lamp manufacturers' operating instructions.

### Accessory · Trim rings

For this luminaire metal trim rings in 3 surfaces are optional available.

Trim rings are accessories and must be ordered separately.

 Item
 Part. No

 Enamel white
 13079

 Stainless steel
 13080

 Chrome
 13081