

**BEGA****50 125.3**

Wall luminaire for indoor use



Project · Reference number

Date

## Product data sheet

### Application

Free-radiating wall LED wall luminaire · indoor luminaire made of hand-blown opal glass, satin matt and metal housing.

The character of the three-ply opal glass creates a smooth and uniform light distribution in the room.

### Product description

Metal housing, finish chrome

Hand-blown opal glass, satin matt

Mounting plate with 2 fixing

holes  $\varnothing$  6 mm · 70 mm spacing

1 cable entry for mains supply cable

up to  $\varnothing$  10.5 mm max. 3 x 1.5<sup>□</sup>


Connection terminal 2.5<sup>□</sup>

Earth conductor connection

LED-Module for mains voltage

220-230 V  $\sim$  50/60 Hz

Safety class I

 – Safety mark

**CE** – Conformity mark

Weight: 0.85 kg

### Lamp

Luminaire connected wattage

12 W

Rated temperature

$t_a = 25$  °C

Ambient temperature

$t_{a,max} = 50$  °C

Service life criteria

50 000 h/L<sub>70</sub>

### 50 125.3 K3

Module designation

LED-0607/830

Colour temperature

3000 K

Colour rendering index

$R_a > 80$

Module luminous flux


1080 lm

Luminaire luminous flux

789 lm

Luminaire luminous efficiency

65,8 lm/W

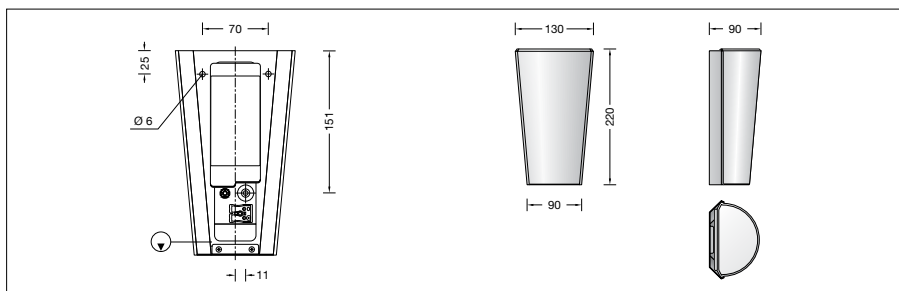

### Article No. 50 125.3

Optional finishes

- White enamel
- Stainless steel
- Chrome
- Brass

code number **.1**

code number **.2**

code number **.3**

code number **.4**