

BEGA**50 125.4**

Wall luminaire for indoor use



Project · Reference number

Date

Product data sheet

Application

Free-radiating wall LED wall luminaire · indoor luminaire made of hand-blown opal glass, satin matt and metal housing.

The character of the three-ply opal glass creates a smooth and uniform light distribution in the room.

Product description

Metal housing, finish brass

Hand-blown opal glass, satin matt

Mounting plate with 2 fixing

holes \varnothing 6 mm · 70 mm spacing

1 cable entry for mains supply cable

up to \varnothing 10.5 mm max. 3 x 1.5[□]

Connection terminal 2.5[□]

Earth conductor connection

LED-Module for mains voltage

220-230 V \sim 50/60 Hz

Safety class I

– Safety mark

CE – Conformity mark

Weight: 0.85 kg

Lamp

Luminaire connected wattage 12 W

Rated temperature $t_a = 25$ °C

Service life criteria 50 000 h / L₇₀

50 125.4 K3

Module designation LED-0607/830


Colour temperature 3000 K

Colour rendering index $R_a > 80$

Module luminous flux 1080 lm

Luminaire luminous flux 789 lm

Luminaire luminous efficiency 65,8 lm/W

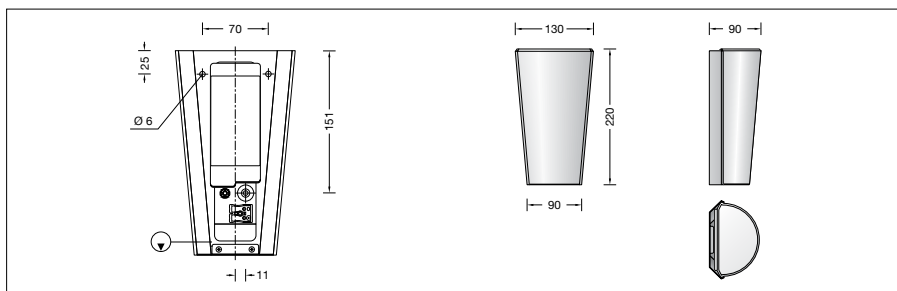

Article No. 50 125.4

Optional finishes

- White enamel code number **.1**
- Stainless steel code number **.2**
- Chrome code number **.3**
- Brass code number **.4**