

BEGA**50 126.1**

Wall luminaire for indoor use



Project · Reference number

Date

Product data sheet

Application

Free-radiating wall LED wall luminaire · indoor luminaire made of hand-blown opal glass, satin matt and metal housing.

The character of the three-ply opal glass creates a smooth and uniform light distribution in the room.

Product description


Metal housing,
finish white enamel
Hand-blown opal glass, satin matt
Mounting plate with 2 fixing
holes \varnothing 6 mm · 74 mm spacing
1 cable entry for mains supply cable
up to \varnothing 10.5 mm max. $3 \times 1.5^{\square}$
Connection terminal 2.5^{\square}
Earth conductor connection
LED-Module for mains voltage
 $220-230 \text{ V} \sim 50/60 \text{ Hz}$
Safety class I
 – Safety mark
CE – Conformity mark
Weight: 1.4 kg

Lamp

Luminaire connected wattage	24 W
Rated temperature	$t_a = 25 \text{ }^{\circ}\text{C}$
Service life criteria	50 000 h/L ₇₀

50 126.1 K3

Module designation	2x LED-0607/830
Colour temperature	3000 K
Colour rendering index	$R_a > 80$
Module luminous flux	2160 lm
Luminaire luminous flux	1314 lm
Luminaire luminous efficiency	54,8 lm/W

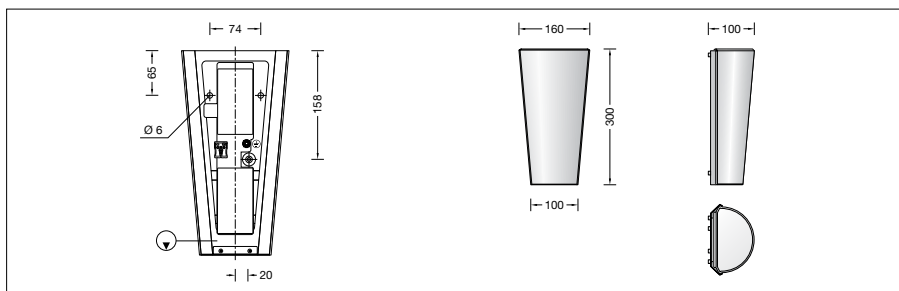

Article No. 50 126.1

Optional finishes

- | | |
|-------------------|-----------------------|
| • White enamel | code number .1 |
| • Stainless steel | code number .2 |
| • Chrome | code number .3 |
| • Brass | code number .4 |