

BEGA**50 134**

Wall luminaire for indoor use

IP 44

Project · Reference number

Date

Product data sheet**Application**

LED wall luminaire · indoor luminaire made of hand-blown opal glass, satin matt and metal fitting, for all lighting tasks in interior applications.

They are ideal for places where a soft and uniform lighting distribution is required.

Luminaire with a high protection class.

Product description

Metal housing, finish
white enamel

Hand-blown opal glass, satin matt

2 mounting holes \varnothing 5.5 mm

Distance apart 100 mm

1 cable entry for mains supply cable

up to \varnothing 10.5 mm max. $3 \times 1.5^{\square}$

Connection terminal 2.5^{\square}

Earth conductor connection

LED-Module for mains voltage

220-230 V \sim 50/60 Hz

BEGA Thermal Switch[®]

Temporary thermal shutdown to protect

temperature-sensitive components

Safety class I

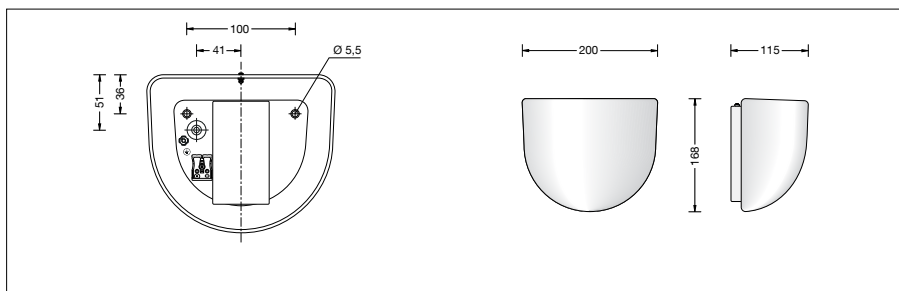
Protection class IP 44

Protected against granular foreign bodies

> 1 mm and splash water

CE – Conformity mark

Weight: 1.1 kg

**Lamp**

Luminaire connected wattage

8 W

Rated temperature

$t_a = 25\text{ °C}$

Ambient temperature

$t_{a \text{ max}} = 45\text{ °C}$

Service life criteria

50 000 h / L_{70}

Service life of the LED

Ambient temperature $t_a = 25\text{ °C}$

– at null: L70B50

max. ambient temperature $t_a = 45\text{ °C}$

– at null: L70B50

50 134 K3

Module designation

LED-0662/830

Colour temperature

3000 K

Colour rendering index

$R_a > 80$

Module luminous flux

760 lm

Luminaire luminous flux

664 lm

Luminaire luminous efficiency

83 lm/W