

BEGA**50 146.4**

Wall washer for indoor use



Project · Reference number



Date

Product data sheet

Application

LED wall washer · indoor luminaire for the glare free illumination of wall surfaces with the mounting surface being the reflection surface. The light emits upwards and downwards.

Product description

Die-cast aluminium and aluminium housing, finish enamel palladium
 Crystal glass, inside matt
 Reflector made of pure anodised aluminium
 2 mounting holes \varnothing 4.8 mm
 Distance apart 200 x 65 mm
 2 cable entries for through-wiring of mains supply cable \varnothing 7-10.5 mm, max. 5G1.5[□]
 Connection terminal 2.5[□]
 Earth conductor connection
 2-pole connecting terminal for digital control
 LED power supply unit
 220-240 V \sim 0/50-60 Hz
 DC 176-280 V
 DALI controllable
 A basic isolation exists between power cable and control line
 Safety class I
 – Safety mark
 – Conformity mark
 Weight: 2.0 kg

Inrush current

Inrush current: 5 A / 50 μ s
 Maximum number of luminaires of this type per miniature circuit breaker:
 B10A: 31 luminaires
 B16A: 50 luminaires
 C10A: 52 luminaires
 C16A: 85 luminaires

Lamp

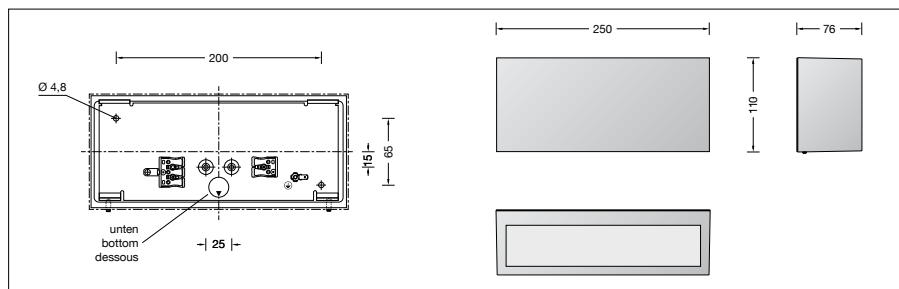
Module connected wattage 25.2 W
 Luminaire connected wattage 29 W
 Rated temperature $t_a = 25$ °C
 Ambient temperature $t_{a \max} = 40$ °C

50 146.4 K3

Module designation 2x LED-0696/930
 Colour temperature 3000 K
 Colour rendering index CRI >90
 Module luminous flux 3160 lm
 Luminaire luminous flux 2244 lm
 Luminaire luminous efficiency 77,4 lm/W

50 146.4 K4

Module designation 2x LED-0696/940
 Colour temperature 4000 K
 Colour rendering index CRI >90
 Module luminous flux 3280 lm
 Luminaire luminous flux 2330 lm
 Luminaire luminous efficiency 80,3 lm/W



Service life of the LED

Ambient temperature $t_a = 25$ °C
 – at 450,000h: L70B50

max. ambient temperature $t_a = 40$ °C
 – at 177,000h: L70B50

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Article No. 50 146.4

LED colour temperature optionally 3000 K or 4000 K
 3000 K – Article number + **K3**
 4000 K – Article number + **K4**

Finish options

- Enamel, white Code number **.1**
- Enamel, palladium Code number **.4**
- Enamel, velvet black Code number **.5**