

BEGA**50 194**

Ceiling and wall luminaire for indoor use



Project · Reference number

Date

Product data sheet

Application

Ceiling and wall luminaire · indoor luminaire made of crystal glass, inside white and metal housing, for all lighting tasks in interior applications.

Product description

Luminaire made of painted metal housing, finish white enamel

Crystal glass, inside white

2 mounting holes \varnothing 5.5 mm

Distance apart 100 mm

1 cable entry for mains supply cable

The luminaire is suitable for through-wiring.

Connecting terminals 2.5²

Earth conductor connection

LED-Module for mains voltage

220-230 V \sim 50/60 Hz

Safety class I

– Safety mark

CE – Conformity mark

Weight: 1.7 kg

Lamp

Luminaire connected wattage 8 W

Rated temperature $t_a = 25$ °C

Service life criteria 50 000 h/L₇₀

50 194 K3

Module designation LED-0662/830

Colour temperature 3000 K

Colour rendering index $R_a > 80$

Module luminous flux 760 lm

Luminaire luminous flux 552 lm

Luminaire luminous efficiency 69 lm/W

50 194 K4

Module designation LED-0662/840


Colour temperature 4000 K

Colour rendering index $R_a > 80$

Module luminous flux 825 lm

Luminaire luminous flux 599 lm

Luminaire luminous efficiency 74,9 lm/W

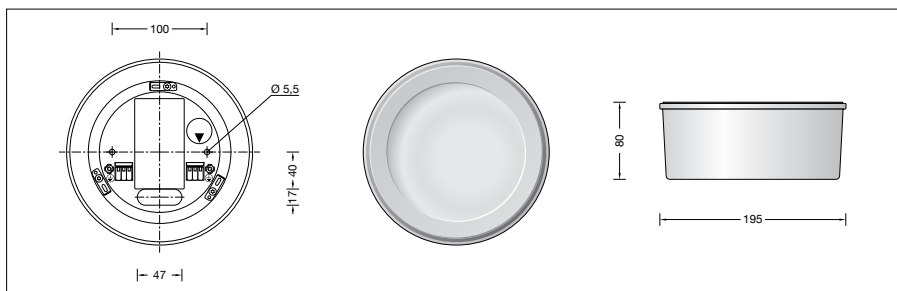

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Article No. 50 194

LED colour temperature optionally 3000 K or 4000 K
 3000 K – Article number + **K3**
 4000 K – Article number + **K4**