

**GLASHÜTTE LIMBURG****Product data sheet****Wall luminaire****50 210**

Project · Reference number

Date

**Application**

Free-radiating LED wall luminaire with crystal glass and metal bracket. For all lighting tasks in interior applications.

They are ideal for places where a soft and uniform lighting distribution is required. The used LED technique offers durability and optimal light output with low power consumption at the same time.

**Product description**

Metal housing, finish white enamel

Crystal glass, inside white

2 fixing holes  $\varnothing$  4.5 mm

219 mm spacing

2 cable entries for through-wiring for mains

cable up to  $\varnothing$  10.5 mm max.  $3 \times 1.5$

Connecting terminal  $2.5$

Earth conductor connection

LED-Module for mains voltage

220 - 230 V  $\sim$  50/60 Hz

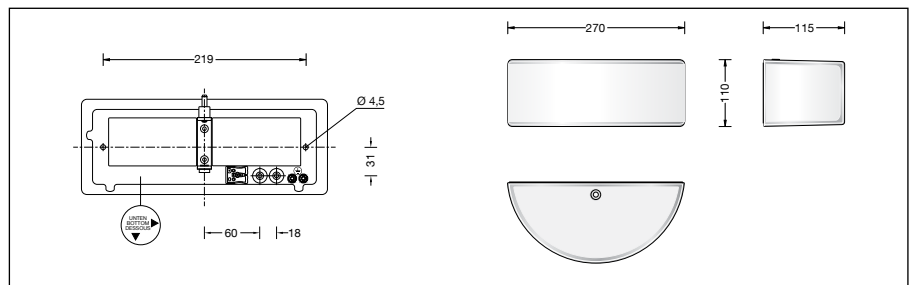
Safety class I

**CE** – Conformity mark

Weight: 2.1 kg



[www.glashuette-limburg.com](http://www.glashuette-limburg.com)

**Lamp**

Luminaire connected wattage 16 W  
 Rated temperature  $t_a = 25$  °C  
 Ambient temperature  $t_{a, max} = 45$  °C  
 Service life criteria 50 000 h/L<sub>70</sub>

Module designation 2x LED-0662/830  
 Colour temperature 3000 K  
 Colour rendering index  $R_a > 80$   
 Module luminous flux 1520 lm  
 Luminaire luminous flux 1145 lm  
 Luminaire luminous efficiency 71,6 lm/W