

**BEGA****50 267.1**

Recessed ceiling luminaire for indoor use



Project · Reference number


Date

## Product data sheet

### Application

Recessed LED ceiling luminaire · indoor luminaire with hand-blown opal glass and metal housing and external LED power supply unit. A focusing / dispersing lens bundles the powerful LED light in the centre of the reflector for a direct proportion of downlight. At the same time, a proportion of the dispersed light is used to illuminate the luminaire glass and to generate the vertical illuminance. Luminaire with adjustable LED colour temperature (Tunable White). For installation into ceilings with a shallow depth in interior areas.

### Product description

Recessed LED ceiling luminaire · Downlight with a remote DALI controllable power supply unit  
Luminaire housing made of metal  
Metal ceiling frame ring, finish white enamel  
Opal glass with screw neck  
Additional focusing / dispersing lens made of partially frosted crystal glass  
Reflector made of pure, high-gloss anodized aluminium  
Silicone gasket  
Ceiling aperture  $\varnothing$  208 mm  
Free space installation depth required 45 mm  
Fixing is achieved by using two adjustable wedge-shaped claws  
Connecting terminal DA DA for digital control  
LED power supply unit  
220-240 V  $\sim$  0/50-60 Hz  
DALI controllable (Device Type 8 for Tunable White according to IEC 62386-209)  
A basic isolation exists between power cable and control line  
Safety class II   
**CE** – Conformity mark  
Weight: 1.8 kg

### Lamp


Module connected wattage	21.4 W
Luminaire connected wattage	24.3 W
Rated temperature	$t_a = 25^\circ\text{C}$
Ambient temperature	$t_{a\text{max}} = 30^\circ\text{C}$

Module designation	LED-0700/9TW
Colour temperature	adjust. 2700 - 6500 K
Colour rendering index	$R_a > 90$
Module luminous flux	2440 lm
Luminaire luminous flux	1643 lm
Luminaire luminous efficiency	67,6 lm/W

### Setting the colour temperature

The LED colour temperature of the luminaire can be set from 2700 to 6500 K ("Tunable White").

Please note: To be able to set the LED colour temperature, the controller used must support DALI Device Type 8. If no LED colour temperature setting is made, 3000 K will be used by default.

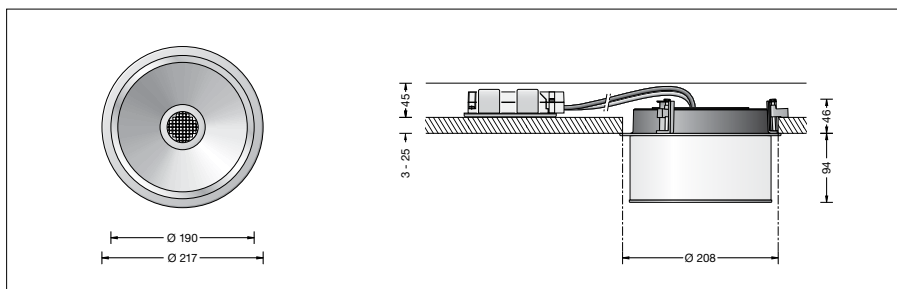

### Lifetime of the LED

Ambient temperature  $t_a = 15^\circ\text{C}$   
 – at 50,000 h: L90B10  
 – at 345,000 h: L70B50

Ambient temperature  $t_a = 25^\circ\text{C}$   
 – at 50,000 h: L80B10  
 – at 186,000 h: L70B50

max. ambient temperature  $t_a = 30^\circ\text{C}$   
 – at 50,000 h: L90B50  
 – at 139,000 h: L70B50

### Lighting technology

Half beam angle  $38^\circ$   
Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and interior lighting as well as luminaire data in EULUMDAT and IES format are available on our website [www.bega.com](http://www.bega.com).

### Article No. 50 267.1

Finish options

- Enamel, white
- Stainless steel
- Polished aluminium

Code number **.1**  
Code number **.2**  
Code number **.3**

### Accessories

#### 13018 Installation housing

For the accessories a separate instructions for use can be provided upon request.