

BEGA**50 454.1**

Wall luminaire for indoor use



Project · Reference number

Date

Product data sheet

Application

Free-radiating wall LED wall luminaire · indoor luminaire made of hand-blown opal glass, satin matt and metal housing.

The character of the three-ply opal glass creates a smooth and uniform light distribution in the room.

Product description

Metal luminaire housing,
finish white enamel

Hand-blown opal glass, satin matt

2 mounting holes \varnothing 6 mm

Distance apart 120 mm

1 cable entry for mains supply cable

up to \varnothing 10.5 mm max. $3 \times 1.5^{\square}$

Connection terminal 2.5^{\square}

Earth conductor connection


LED-Module for mains voltage

220-230 V \sim 50/60 Hz

BEGA Thermal Switch[®]

Temporary thermal shutdown to protect temperature-sensitive components

Safety class I

 – Safety mark

CE – Conformity mark

Weight: 1.6 kg

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Lamp

Luminaire connected wattage

8 W

Rated temperature

$t_a = 25^{\circ}\text{C}$

Ambient temperature

$t_{a\text{max}} = 45^{\circ}\text{C}$

50 454.1 K3

Module designation

LED-0662/830

Colour temperature

3000 K

Colour rendering index

$R_a > 80$

Module luminous flux



760 lm

Luminaire luminous flux

679 lm

Luminaire luminous efficiency

84,9 lm/W

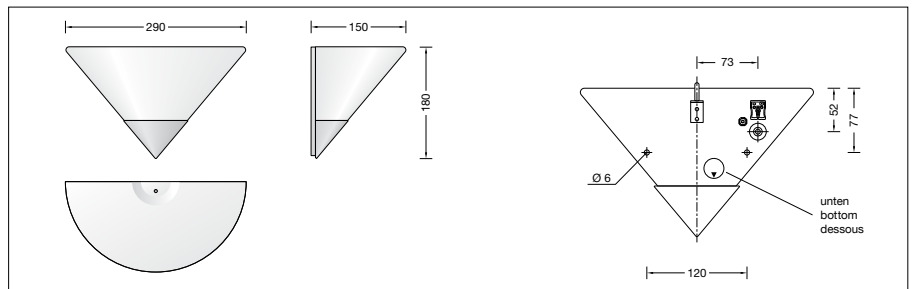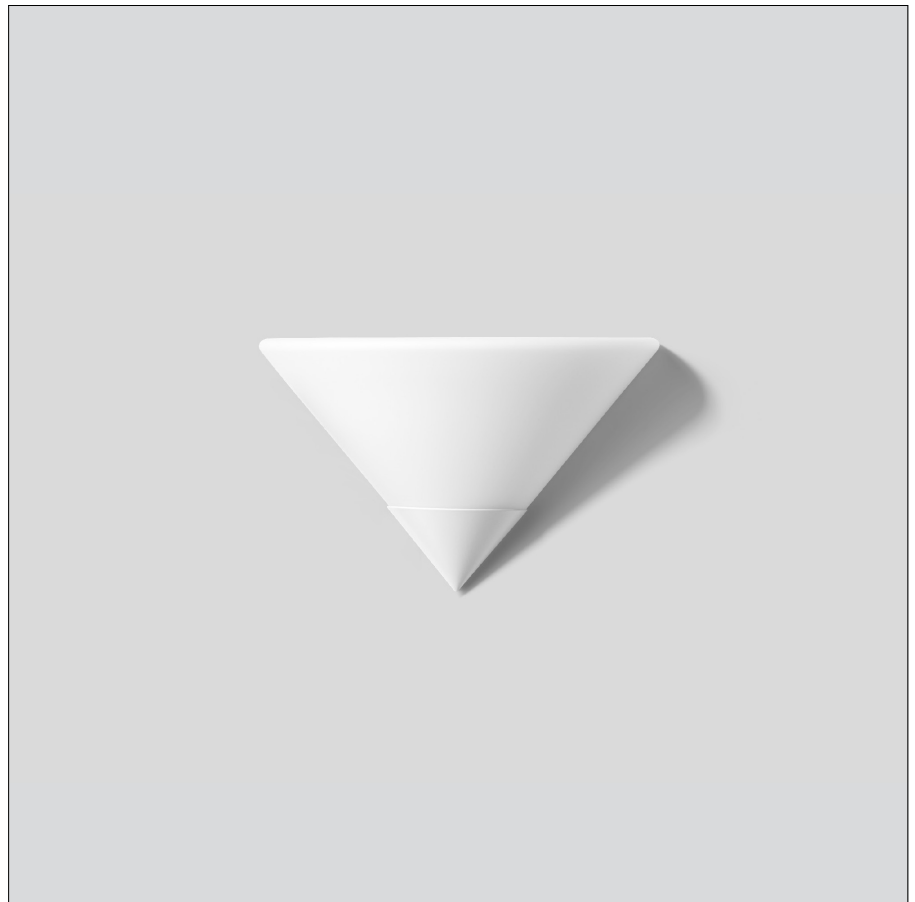

Service life of the LED

Ambient temperature $t_a = 25^{\circ}\text{C}$

– at 42,000h: L70B50

max. ambient temperature $t_a = 45^{\circ}\text{C}$

– at 32,000h: L70B50

Article No. 50 454.1

Finish options

- Enamel, white
- Brass

Code number **.1**

Code number **.4**