

BEGA**50613.2**

Pendant luminaire for indoor use

Project · Reference number

Date

Product data sheet

Application

LED Pendant luminaire · indoor luminaire with partially satin matt crystal glass and reflector for directed light to provide a high horizontal illuminance.

Product description

Luminaire made of aluminium, finish stainless steel
Crystal glass, partially satin matt, with screw neck
Reflector made of pure anodised aluminium
Black flex suspension $5 \times 0,75$ □ with 1 steel messenger wire
Overall length of luminaire approx. 3000 mm
Connecting terminals and earth conductor terminal 2,5[□]
Connecting terminal for digital control
LED power supply unit
220-240 V \sim 0/50-60 Hz
DC 176-280 V
DALI controllable
A basic isolation exists between power cable and control line
Safety class I
CE – Conformity mark
Weight: 2.4 kg

Inrush current

Inrush current: 5 A / 50 μ s
Maximum number of luminaires of this type per miniature circuit breaker:
B10A: 31 luminaires
B16A: 50 luminaires
C10A: 52 luminaires
C16A: 85 luminaires

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Lamp

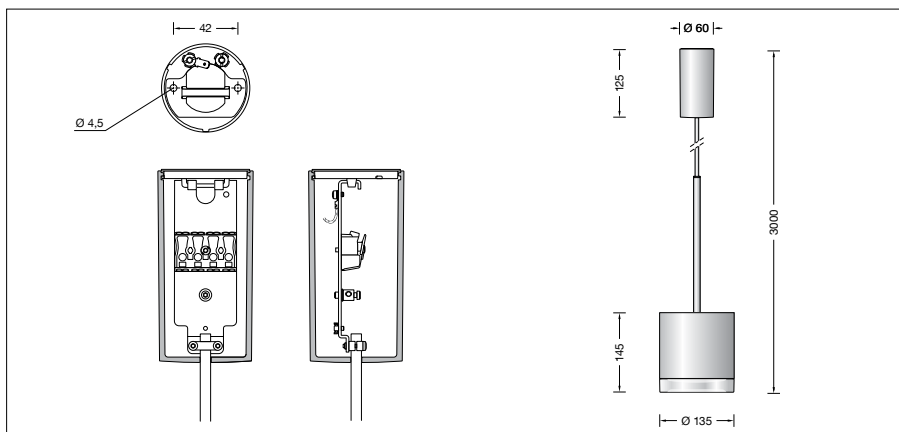
Module connected wattage	11.5 W
Luminaire connected wattage	13.7 W
Rated temperature	$t_a = 25$ °C
Ambient temperature	$t_{a \max} = 30$ °C

50613.2K3

Module designation	LED-0800/930
Colour temperature	3000 K
Colour rendering index	CRI >90
Module luminous flux	1735 lm
Luminaire luminous flux	1151 lm
Luminaire luminous efficiency	84 lm/W

50613.2K4

Module designation	LED-0800/940
Colour temperature	4000 K
Colour rendering index	CRI >90
Module luminous flux	1760 lm
Luminaire luminous flux	1168 lm
Luminaire luminous efficiency	85,3 lm/W

**Service life of the LED**

Ambient temperature $t_a = 25$ °C
– at 400,000h: L70B50

max. ambient temperature $t_a = 30$ °C
– at 370,000h: L70B50

Article No. 50613.2

LED colour temperature optionally 3000 K or 4000 K
3000 K – Article number + **K3**
4000 K – Article number + **K4**

Optional finishes

- Velvet white enamel with code number **.1**
- Stainless steel with code number **.2**