

**BEGA****50 647.2**

Ceiling and wall luminaire for indoor use

IP 64

Project · Reference number

Date

**Product data sheet****Application**

Ceiling and wall luminaire · indoor luminaire with LEDs made of aluminium and hand-blown crystal glass.

For a variety of interior lighting applications.

**Product description**

Luminaire made of aluminium, finish stainless steel

Hand-blown crystal glass, white inside, with screw-neck

Silicone gasket

2 mounting holes  $\varnothing$  5.5 mm

Distance apart 220 mm

2 cable entries for through-wiring for mains

cable up to  $\varnothing$  10.5 mm max.  $3 \times 1.5^{\square}$

Connecting terminal 2.5<sup>□</sup>

with plug connection

Earth conductor connection

LED power supply unit

220-240 V  $\sim$  0/50-60 Hz

DC 170-280 V

Safety class I

Protection class IP 64

Dust-tight and protection against splash water

**CE** – Conformity mark

Weight: 2.6 kg

**Inrush current**

Inrush current: 5 A / 50  $\mu$ s

Maximum number of luminaires of this type per miniature circuit breaker:

B 10A: 31 luminaires

B 16A: 50 luminaires

C 10A: 52 luminaires

C 16A: 85 luminaires

**Light technique**

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page [www.bega.com](http://www.bega.com).

**Lamp**

Module connected wattage 19.6 W

Luminaire connected wattage 22.8 W

Rated temperature  $t_a = 25$  °C

Ambient temperature  $t_{a \max} = 40$  °C

**50 647.2 K3**

Colour temperature 3000 K

Colour rendering index CRI > 90

Module luminous flux 2825 lm

Luminaire luminous flux 1692 lm

Luminaire luminous efficiency 74,2 lm/W

**50 647.2 K4**

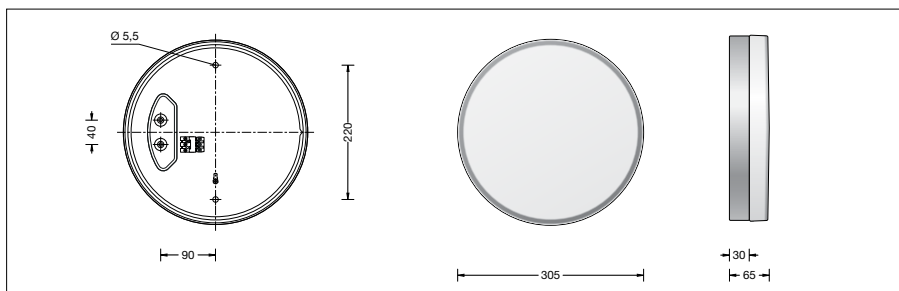
Colour temperature 4000 K

Colour rendering index CRI > 90

Module luminous flux 2930 lm

Luminaire luminous flux 1753 lm

Luminaire luminous efficiency 76,9 lm/W

**Service life of the LED**

Ambient temperature  $t_a = 25$  °C

– at 222,000 h: L70 B50

max. ambient temperature  $t_a = 40$  °C

– at 93,000 h: L70 B50

**Article No. 50 647.2**

LED colour temperature optionally 3000 K or 4000 K

3000 K – Article number + **K3**

4000 K – Article number + **K4**

Optional finishes

- White enamel code number **.1**
- Stainless steel code number **.2**
- Polished aluminium code number **.3**