# BEGA

Recessed ceiling luminaire for indoor use

Project · Reference number

Date

 $\odot$ 

## Product data sheet

### Application

Recessed LED-ceiling luminaire · indoor luminaire with symmetrical wide beam light distribution for connection to external LED power supply unit. For flush installation in indoor suspended ceilings of 5-25 mm thickness.

## Product description

LED recessed luminaire without power supply unit Luminaire housing made of cast aluminium The recessed housing is made of glass fibre reinforced synthetic material Centre-plate made of rigid polystyrene foam Trim ring, Enamel, velvet white Reflector made of pure anodised aluminium Inside hue matt copper Recessed opening ø 142 mm Recessed depth required 105 mm 1 connecting cable with strain relief and plug connector system for BEGA power supply unit, on/off or DALI

Safety class III 🚸 **CE** – Conformity mark Weight: 0.75 kg

## Lighting technology

#### Half beam angle 43°


Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and interior lighting as well as luminaire data in EULUMDAT and IES format are available on our website www.bega.com.

## Lamp

Module connected wattage	11.5 W
Luminaire connected wattage	13.5 W
Rated temperature	t <sub>a</sub> =25 °C
Ambient temperature	t <sub>a max</sub> =35 °C

#### 50 682.6 K3

Module designation	LED-0800/93
Colour temperature	3000 l
Colour rendering index	CRI > 9
Module luminous flux	1735 lr
Luminaire luminous flux	1096 lr
Luminaire luminous efficiency	81,2 lm/V

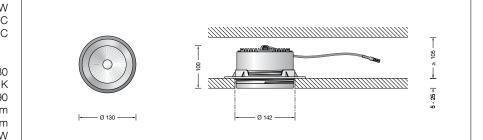

## Accessories

Power supply units for LED luminaires 220-240 V · 0/50-60 Hz with strain relief and plug connector system.

13144 Power supply unit on/off 13169 Power supply unit DALI

The power supply units are only suitable for the operation of one LED luminaire.

For the accessories a separate instructions for use can be provided upon request.

# Article No. 50 682.6

- Interior colour options
- matt aluminium
- matt brass
- matt copper

Code number .4

Code number .2

Code number .6