

BEGA**50 713.2**

Recessed ceiling luminaire for indoor use



Project · Reference number

Date

Product data sheet

Application

Pivoting recessed LED-ceiling luminaire · indoor luminaire partially satin matt crystal glass inside and aluminium alloy housing.

Efficient luminaires for adjustable, brilliant light in the residential living space and for use in many other ranges of interior illumination. For installation into ceilings with a shallow depth in interior areas.

Product description

Recessed ceiling luminaire »ACCENTA VARIO«

Die-cast aluminium housing

Crystal glass, partially satin matt inside

Reflector made of pure, high-gloss anodized aluminium

Ceiling frame ring made of stainless steel

Recessed opening \varnothing 95 mm

Recessed depth required 60 mm

Fixing is achieved by using

2 adjustable claws

External LED power supply unit

220-240 V \sim 0/50-60 Hz

Safety class II

CE – Conformity mark

Weight: 0.6 kg

Inrush current

Inrush current: 5 A / 50 μ s

Maximum number of luminaires of this type per miniature circuit breaker:

B 10A: 30 luminaires

B 16A: 50 luminaires

C 10A: 52 luminaires

C 16A: 85 luminaires

Lamp

Module connected wattage 8.5 W

Luminaire connected wattage 10.2 W

Rated temperature $t_a = 25$ °C

Ambient temperature $t_{a \max} = 45$ °C

When installed in heat-insulating material $t_{a \max} = 25$ °C

50 713.2 K3

Module designation LED-0923/930

Colour temperature 3000 K

Colour rendering index CRI > 90

Module luminous flux 1200 lm

Luminaire luminous flux 604 lm

Luminaire luminous efficiency 59,2 lm/W

50 713.2 K2

Module designation LED-0923/927


Colour temperature 2700 K

Colour rendering index CRI > 90

Module luminous flux 1155 lm

Luminaire luminous flux 581 lm

Luminaire luminous efficiency 57 lm/W

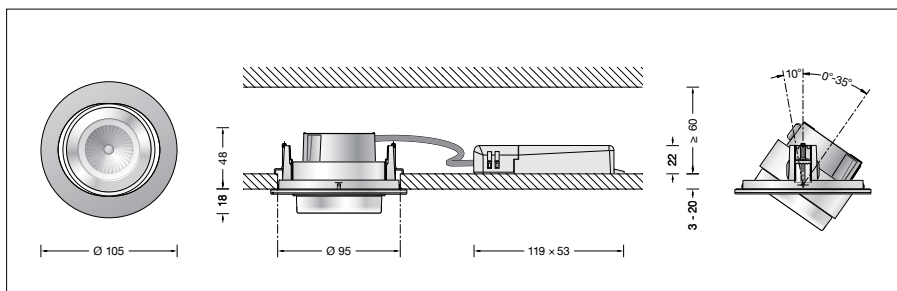

Service life of the LED

Ambient temperature $t_a = 25$ °C

– at 150,000h: L70B50

max. ambient temperature $t_a = 45$ °C

– at 130,000h: L70B50

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Article No. 50 713.2

Colour temperature 3000 K.

Also available with 2700 K on request.

3000 K – article number + **K3**

2700 K – article number + **K2**

Trim ring optionally available in:

- Metal, white Code number **.1**
- Stainless steel Code number **.2**
- Polished stainless steel Code number **.3**
- Brass Code number **.4**