

**BEGA****50 820.4**

Pendant luminaire for indoor use

Project · Reference number

Date

**Product data sheet****Application**

Pendant luminaire · indoor luminaire for free-radiating and uniform light made of hand-blown opal glass, satin matt. Metal luminaire housing.

**Product description**

Metal luminaire housing and canopy, finish brass  
 Hand-blown opal glass, satin matt  
 Mounting plate with 2 fixing holes  $\varnothing$  4.5 mm · 136 mm spacing  
 White flex suspension  $3 \times 0,75$  □ with 1 steel messenger wire  
 Overall length of luminaire approx. 2000 mm  
 Connection terminal 2.5 □  
 Earth conductor connection  
 LED power supply unit inside canopy  
 220-240 V  $\sim$  0/50-60 Hz  
 DALI controllable  
 A basic isolation exists between power cable and control line  
 Safety class I  
**CE** – Conformity mark  
 Weight: 2.5 kg

**Inrush current**

Inrush current: 5 A / 50  $\mu$ s  
 Maximum number of luminaires of this type per miniature circuit breaker:  
 B10A: 31 luminaires  
 B16A: 50 luminaires  
 C10A: 52 luminaires  
 C16A: 85 luminaires

**Light technique**

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page [www.bega.com](http://www.bega.com).

**Lamp**

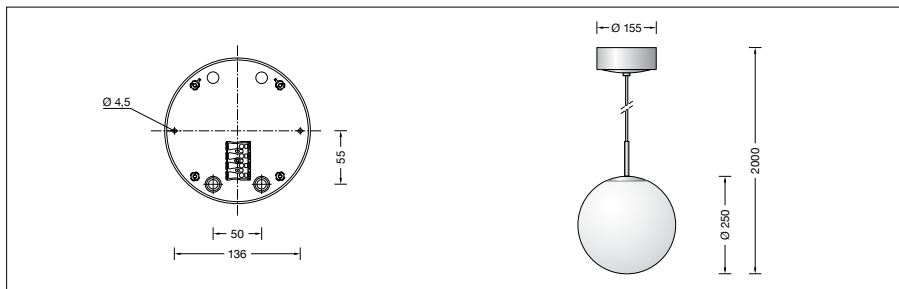
Module connected wattage	23 W
Luminaire connected wattage	26.5 W
Rated temperature	$t_a = 25$ °C
Ambient temperature	$t_{a \max} = 40$ °C

**50 820.4 K3**

Module designation	5x LED-1048/930
Colour temperature	3000 K
Colour rendering index	CRI > 90
Module luminous flux	3450 lm
Luminaire luminous flux	2632 lm
Luminaire luminous efficiency	99,3 lm/W

**50 820.4 K4**

Module designation	5x LED-1048/940
Colour temperature	4000 K
Colour rendering index	CRI > 90
Module luminous flux	3500 lm
Luminaire luminous flux	2711 lm
Luminaire luminous efficiency	102,3 lm/W

**Service life · Ambient temperature**

Rated temperature $t_a = 25$ °C	LED psu: > 50,000h
LED module:	150,000h (L80 B50)
	50,000h (L80 B50)

Ambient temperature $t_{a \max} = 40$ °C (100 %)	LED psu: 50,000h
LED module:	110,000h (L80 B50)
	50,000h (L80 B50)

**Article No. 50 820.4**

LED colour temperature optionally 3000 K or 4000 K  
 3000 K – Article number + **K3**  
 4000 K – Article number + **K4**

**Optional finishes**

• White enamel	code number <b>.1</b>
• Stainless steel	code number <b>.2</b>
• Chrome	code number <b>.3</b>
• Brass	code number <b>.4</b>

If the article number is followed by a **P**, we can also supply these luminaires in impact-resistant synthetic material.