

**BEGA****50 822.3 P**

Pendant luminaire for indoor use

Project · Reference number

Date

**Product data sheet****Application**

Pendant luminaire · indoor luminaire for free-radiating and uniform light with white synthetic globe and with metal luminaire housing.

**Product description**

Metal luminaire housing and canopy, chrome finish  
 White synthetic globe  
 Mounting plate with 2 fixing holes  $\varnothing$  4.5 mm · 138 mm spacing  
 Black flex suspension  $3 \times 0,75$  □ with 1 steel messenger wire  
 Overall length of luminaire approx. 2000 mm  
 Connection terminal 2.5 □  
 Earth conductor connection  
 LED power supply unit inside canopy  
 220-240 V  $\sim$  0/50-60 Hz  
 DALI controllable  
 A basic isolation exists between power cable and control line  
 Safety class I  
**CE** – Conformity mark

**Inrush current**

Inrush current: 26 A / 264  $\mu$ s  
 Maximum number of luminaires of this type per miniature circuit breaker:  
 B10A: 10 luminaires  
 B16A: 16 luminaires  
 C10A: 16 luminaires  
 C16A: 26 luminaires

**Lamp**

Module connected wattage 52.5 W  
 Luminaire connected wattage 58.5 W  
 Rated temperature  $t_a = 25$  °C  
 Ambient temperature  $t_{a \max} = 40$  °C

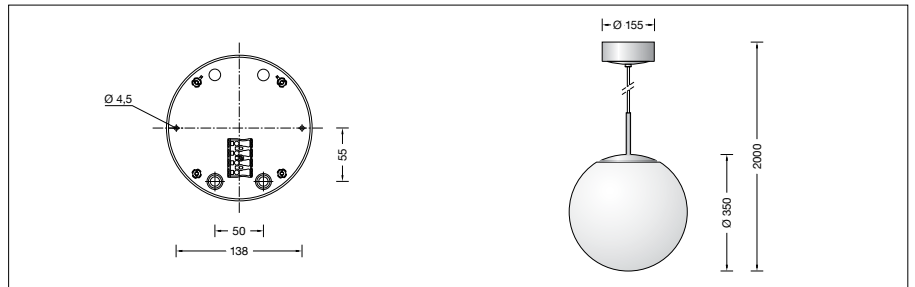
**50 822.3 P K3**

Module designation 5x LED-0978/930  
 Colour temperature 3000 K  
 Colour rendering index CRI > 90  
 Module luminous flux 7950 lm  
 Luminaire luminous flux\* 6600 lm  
 Luminaire luminous efficiency\* 112,8 lm/W

**50 822.3 P K4**

Module designation 5x LED-0978/930  
 Colour temperature 4000 K  
 Colour rendering index CRI > 90  
 Module luminous flux 8075 lm  
 Luminaire luminous flux\* 6704 lm  
 Luminaire luminous efficiency\* 114,6 lm/W

\* preliminary data

**Service life · Ambient temperature**

Rated temperature  $t_a = 25$  °C  
 LED psu: > 50,000 h  
 LED module: 120,000 h (L80 B50)  
 Ambient temperature  $t_{a \max} = 40$  °C (100 %)  
 LED psu: 50,000 h  
 LED module: 80,000 h (L80 B50)

**Light technique**

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page [www.bega.com](http://www.bega.com).

**Article No. 50 822.3 P**

LED colour temperature optionally 3000 K or 4000 K  
 3000 K – Article number + **K3**  
 4000 K – Article number + **K4**

**Optional finishes**

- White enamel code number **.1**
- Stainless steel code number **.2**
- Chrome code number **.3**
- Brass code number **.4**