

GLASHÜTTE LIMBURG**Product data sheet****Pendant luminaire****5590.1 P**

Project · Reference number

Date

Application

Pendant luminaire for free-radiating and uniform light with white synthetic globe and metal luminaire housing.

The used LED technique offers durability and optimal light output with low power consumption at the same time.

Product description

Metal luminaire housing and canopy, finish white enamel

White synthetic globe

White flex suspension $2 \times 0,5 \square$ with 1 steel messenger wire

Overall length of luminaire ~2000 mm

LED power supply unit

220-240 V \sim 0/50-60 Hz

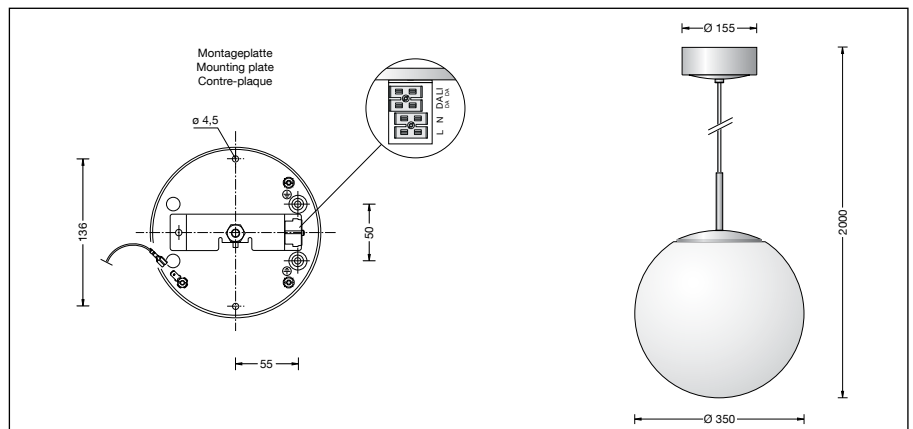
DALI controllable

A basic isolation exists between power cable and control line

Safety class I

CE – Conformity mark

Weight: 4.0 kg


www.glashuette-limborg.com
**Lamp**

Module connected wattage 28,5 W

Luminaire connected wattage 33 W

Rated temperature $t_a = 25 \text{ }^\circ\text{C}$

Service life criteria 50 000 h / L_{70}

Article No. 5590.1 P

Finish options

• Enamel, white

• Stainless steel

• Chrome

• Brass

Code number **.1**

Code number **.2**

Code number **.3**

Code number **.4**

5590.1 P

Module designation LED-0523/830

Colour temperature 3000 K

Colour rendering index $R_a > 80$

Module luminous flux 4090 lm

Luminaire luminous flux 3193 lm

Luminaire luminous efficiency 96,8 lm/W

Colour temperature 3000 K.

Also available with 4000 K on request.

3000 K – article number

4000 K – article number + **K4**

If the article number is followed by a **P**, we can also supply luminaires in tough synthetic material.

5590.1 P K4

Module designation LED-0523/840

Colour temperature 4000 K

Colour rendering index $R_a > 80$

Module luminous flux 4280 lm

Luminaire luminous flux 3342 lm

Luminaire luminous efficiency 101,3 lm/W