

BEGA**66 758**

Lichtbaustein ®



Project · Reference number

Date

Product data sheet

Application

Lichtbaustein® Square
Ceiling and wall luminaire for many lighting tasks.
Ideal for places where a soft and uniform
lighting distribution is required.
For exterior application only.

Product description

Luminaire made of aluminium alloy
and stainless steel
BEGA Unidure® coating technology
Opal glass satin matt
2 mounting holes \varnothing 5 mm
Distance apart 170 mm
1 cable entry for mains supply cable
up to \varnothing 10,5 mm max. $3 \times 1,5^{\square}$
2 prefabricated cable ducts for surface
mounted mains supply cables \varnothing 7-10,5 mm
Connection terminal 2.5^{\square}
Earth conductor connection
Lampholder E 27
Safety class I
Protection class IP 44
Protected against granular foreign bodies
> 1 mm and splash water
Luminaire only suitable for exterior application
Impact strength IK02
Protection against mechanical
impacts < 0.2 joule
 – Safety mark
CE – Conformity mark
Weight: 2.7 kg

Lamps

Luminaire with lampholder E 27
Lamp output max. 2×60 W



For this luminaire we recommend the following
BEGA LED lamps:

13510 LED 7 W · 805 lm · 2700 K
13548 LED 7 W · 805 lm · 2700 K
dimnable

13584 LED 7 W · 805 lm · 3000 K
13586 LED 7 W · 805 lm · 3000 K
dimnable

13512 LED 8 W · 1055 lm · 2700 K
13588 LED 8 W · 1055 lm · 3000 K

Detailed technical and lighting data for the
lamps can be found in the data sheets on our
website.

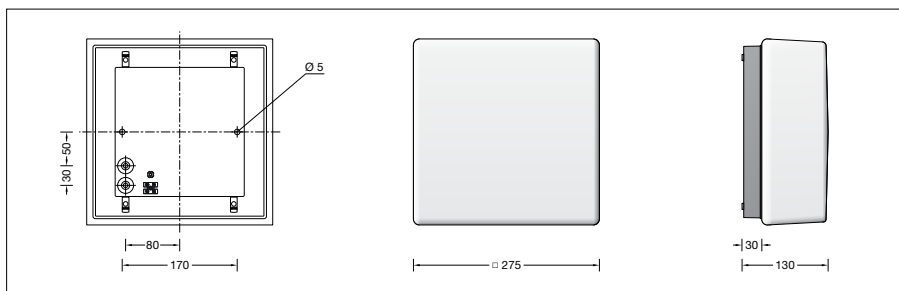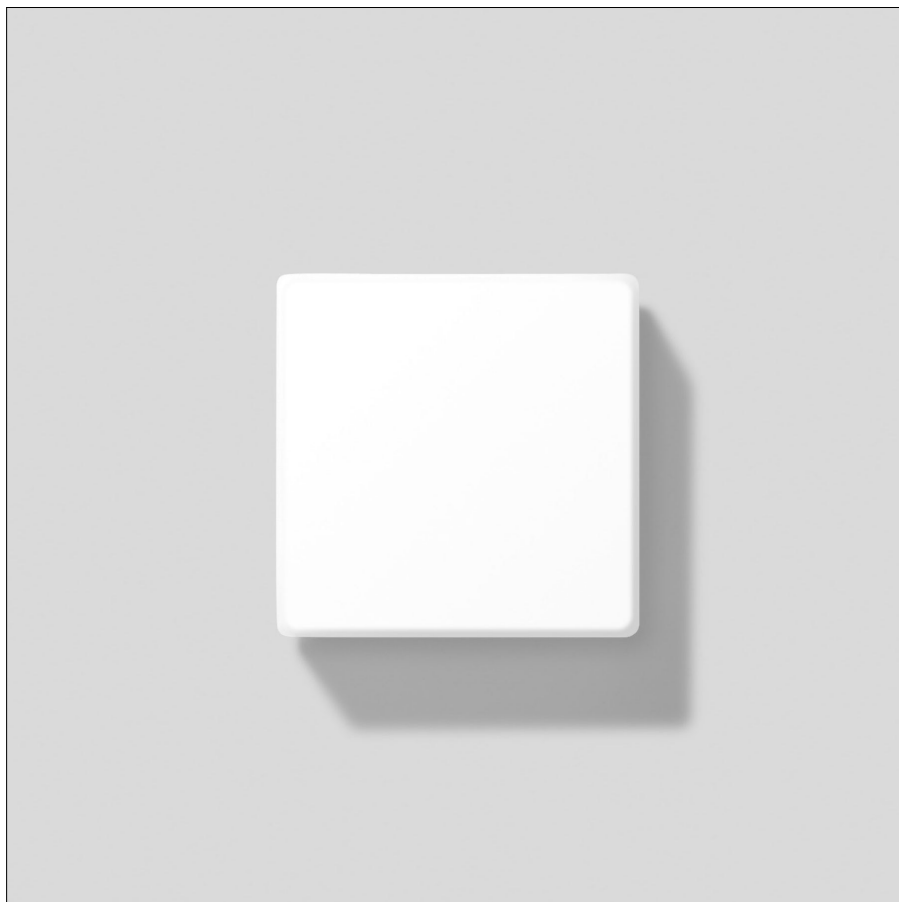

Light technique

Luminaire data for the light planning program
DIALux for outdoor lighting, street lighting and
indoor lighting as well as luminaire data in
EULUMDAT- and IES-format you will find on the
BEGA web page www.bega.com.

Light distribution

