

**BEGA****67 635**

Ceiling and wall luminaire for indoor use

IP 44

Project · Reference number

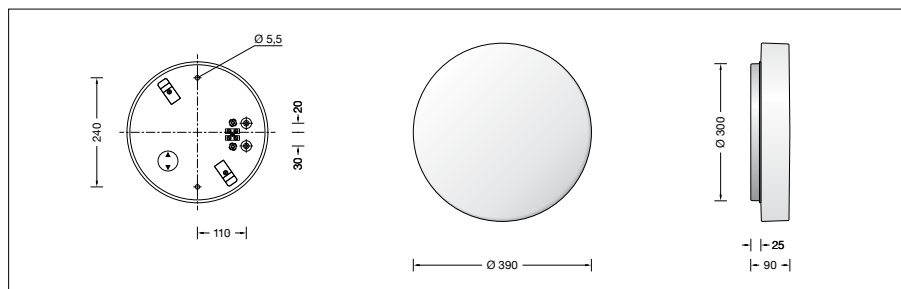
Date

**Product data sheet****Application**

Ceiling and wall luminaire · indoor luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks. They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class.

**Product description**

Metal housing,  
finish white enamel  
Hand-blown opal glass, satin matt,  
with sliding-bolt closure  
2 mounting holes  $\varnothing$  5.5 mm  
Distance apart 240 mm  
2 cable entries for through-wiring for mains  
cable up to  $\varnothing$  10.5 mm max.  $3 \times 1.5^{\square}$   
Connection terminal  $2.5^{\square}$   
Earth conductor connection  
Lampholder GX 24 q-3  
Electronic ballast (EEL=A2)  
220-240 V  $\sim$  0/50-60 Hz  
DC 176-280 V  
DC Start  $\geq$  198 V  
Safety class I  
Protection class IP 44  
Protected against granular foreign bodies  
> 1 mm and splash water  
**CE** – Conformity mark  
Weight: 3.0 kg

**Lamps**

2 Compact fluorescent lamps  
TC-TELI 26 W · GX 24 q-3

Osram: Dulux T/E... 26 W 1800 lm  
Philips: PL-T TOP 26 W / 4p 1800 lm

Please note the lamp manufacturers' operating instructions.

**Article No. 67 635**

If the article number is followed by a **P**, we can also supply these luminaires in impact-resistant synthetic material.