

BEGA**67 636 P**

Ceiling and wall luminaire for indoor use

IP 44

Project · Reference number

Date

Product data sheet

Application


Ceiling and wall luminaire made of impact resistant synthetic diffuser, and metal housing, for all lighting tasks in interior applications. They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class.

Product description

Metal housing,
finish white enamel
Impact resistant synthetic diffuser, white,
with sliding-bolt closure
2 mounting holes \varnothing 5.5 mm
Distance apart 280 mm
2 cable entries for through-wiring for mains
cable up to \varnothing 10.5 mm max. 3×1.5^2
Connection terminal 2.5^2
Earth conductor connection
Lampholder GX 24 q-3
Electronic ballast (EEL=A2)
220-240 V \sim 0/50-60 Hz
DC 176-280 V
DC Start \geq 198 V
Safety class I
Protection class IP 44
Protected against granular foreign bodies
> 1 mm and splash water
CE – Conformity mark
Weight: 5.7 kg

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

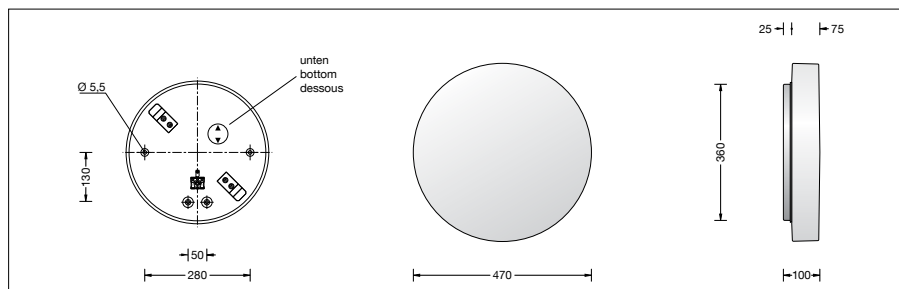

Lamps

2 Compact fluorescent lamps
TC-TELI 26 · 32 W · GX 24 q-3

Osram:

Dulux T/E ... 26 W	1800 lm
Dulux T/E ... 32 W	2400 lm

Philips:

PL-T TOP 26 W/4p	1800 lm
PL-T TOP 32 W/4p	2400 lm

Please note the lamp manufacturers' operating instructions.