


**BEGA****77 944**

Floodlight



Project · Reference number

Date

## Product data sheet

### Application

Floodlight with mounting box for interior and exterior applications.

For permanent installation on a wall, under a ceiling or on a pillar.

For floodlighting plants and small woodlands, for wall and other surfaces and for various lighting purposes in the private sector.

### Product description

Floodlight made of glass-fibre reinforced polyamide

Silicone gasket

No tools are needed to adjust the operating position

Rotation range of mounting box 340°

Mounting box with 2 fixing holes

ø 5 mm · 60 mm spacing

2 cable entries for through-wiring of mains supply cable ø 7-10,5 mm, max. 3G1.5<sup>□</sup>

2 prefabricated cable ducts for surface mounted mains supply cables ø 7 - 10,5 mm

Connecting terminals 2.5<sup>□</sup>

Lampholder E 27

Safety class II

Protection class IP 65


Dust-tight and protection against water jets

0.5 m minimum distance to the illuminated surface

– Safety mark

**CE** – Conformity mark

Weight: 0.65 kg

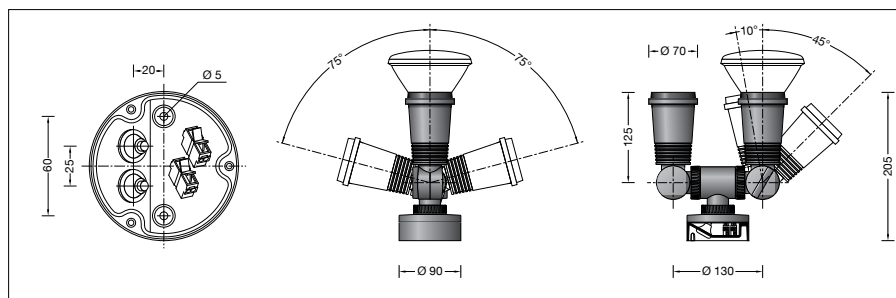

### Lamps

2 Pressed glass reflector bulbs PAR 38 · E 27

Spot 12° · Flood 30°

PAR 38 · 60 W · E 27 470 lm

PAR 38 · 80 W · E 27 670 lm

PAR 38 · 120 W · E 27 1100 lm

Narrow beam – Spot · 12°

Broad beam – Flood · 30°

Please note the lamp manufacturers' operating instructions.