




BEGA**77 945**

Floodlight




 IP 65

Project · Reference number

Date

Product data sheet

Application

Floodlight with mounting box for interior and exterior applications.

For permanent installation on a wall, under a ceiling or on a pillar.

For floodlighting plants and small woodlands, for wall and other surfaces and for various lighting purposes in the private sector.

Product description

Floodlight made of glass-fibre reinforced polyamide

No tools are needed to adjust the operating position

Rotation range of mounting box 340°

Swivel range -70°/+70°

2 fixing holes \varnothing 5 mm


60 mm spacing

2 cable entries for through-wiring of mains supply cable \varnothing 7-10,5 mm,

max. 3G1.5[□]


Connecting terminals 2.5[□]


Lampholder E 27


Safety class II 

Protection class IP 65

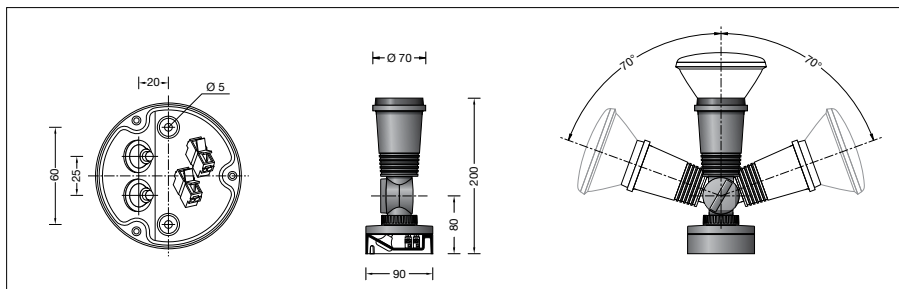
Dust-tight and protection against water jets

\varnothing 0.5 m  minimum distance to the illuminated surface

 – Safety mark

 – Conformity mark

Weight: 0.35 kg



Lamp

Pressed glass reflector bulb

PAR 38 · 60 W · E 27

470 lm

PAR 38 · 80 W · E 27

670 lm

PAR 38 · 120 W · E 27

1100 lm

Narrow beam – Spot · 12°

Broad beam – Flood · 30°

Cool beam reflector lamps

PAR 38 must not be used.



Light distribution

