

BEGA**84 056**

Pole top luminaire » Berlin «

IP 23

Project · Reference number

Date

Product data sheet

Application

Pole top luminaire for the illumination of surfaces and walks for interior and exterior applications. Clear antique glass for brilliant light. For mounting heights from 1600 - 2000 mm.

Product description

Luminaire made of aluminium alloy, aluminium and stainless steel
 BEGA Unidure® coating technology
 Antique glass
 For pole top \varnothing 60 mm
 Slip fitter insert depth 45 mm
 Connecting terminal and earth conductor terminal 2.5[□]
 Strain-relief clamp
 Lampholder E 27
 Safety class I
 Protection class IP 23
 Protected against granular foreign bodies > 12 mm and showers up to 60°
 CE – Conformity mark
 Horizontal wind catching area: 0.069 m²
 Weight: 2.9 kg

Lamp

Luminaire with lampholder E 27
 Lamp output max. 100 W

For this luminaire we recommend the following BEGA LED lamps:


13 509 LED 7 W · 805 lm · 2700 K
13 547 LED 7 W · 805 lm · 2700 K
 dimmable

13 583 LED 7 W · 805 lm · 3000 K
13 585 LED 7 W · 805 lm · 3000 K
 dimmable

13 511 LED 8 W · 1055 lm · 2700 K
13 562 LED 12 W · 1520 lm · 2700 K
13 563 LED 12 W · 1520 lm · 2700 K
 dimmable

13 587 LED 8 W · 1055 lm · 3000 K
13 589 LED 12 W · 1520 lm · 3000 K
13 591 LED 12 W · 1520 lm · 3000 K
 dimmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

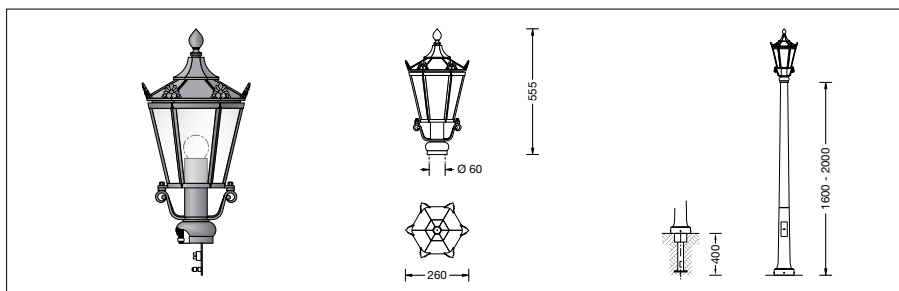

Accessories

For this luminaire we recommend the following BEGA luminaire poles:

Tapered aluminium poles, lacquered without access door

70 545 Pole with baseplate H 1400 mm

Tapered aluminium poles, lacquered with access door and C-clamp

70 546 Pole with baseplate H 2000 mm

For suitable connection boxes please see the instructions for use of the luminaire poles.

For the accessories a separate instructions for use can be provided upon request.