

BEGA**84 071**

Garden luminaire

IP 44

Project · Reference number

Date

Product data sheet

Application

Shielded garden luminaire made of copper with hand-blown opal glass.

The light will be fully screened by the top reflector and directed downwards with a broad spread light distribution.

For an effective illumination of paths, seats and beds in gardens.

Product description

Luminaire made of copper,

brass and stainless steel

Baseplate made of bronze alloy

Opal glass with screw neck

Silicone gasket

Luminaire with mounting plate for bolting onto a foundation or an anchorage unit

Mounting plate with 3 fixing holes \varnothing 7 mm

Angle 120° · Pitch circle \varnothing 70 mm

Mounting bracket with connection box and

3-pole terminal 4^{\square} for connection of

mains supply cable max. $3 \times 2.5^{\square}$

Lampholder E 14

Safety class I

Protection class IP 44

Protected against granular foreign bodies

> 1 mm and splash water

CE – Conformity mark

Weight: 5.5 kg

Copper


The luminaire parts made of solid copper are delivered with the metal's natural surface colour. Time and weather factors create the natural patina characteristic for copper.

Bronze

The luminaire is made of massive bronze and delivered with the metal's natural surface. Time and weather factors create the natural patina characteristic for bronze.

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

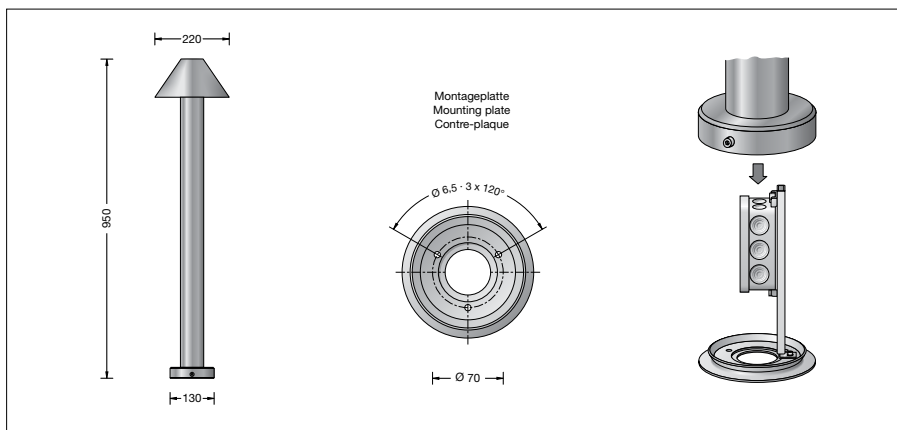

Lamp

Luminaire with lampholder E 14

Lamp output max. 40 W

For this luminaire we recommend the following BEGA LED lamps:

13 552 LED 4 W · 470 lm · frosted · 2700 K

13 594 LED 4 W · 470 lm · frosted · 3000 K

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

Accessories

70 894 Anchorage unit
Anchorage unit with mounting flange made of galvanised steel. Total length 400 mm.
3 stainless steel fixing screws M 6.
Pitch circle \varnothing 70 mm.

See the separate instructions for use.