

**BEGA****84 075**

Garden luminaire

IP 64

Project · Reference number

Date

## Product data sheet

### Application

Shielded garden luminaire with directed light.  
A shield made of aluminium screens the light of the luminaire upwards and forwards and directs it onto the surface to be illuminated.  
A small light aperture on the back illuminates additionally the luminaire shape.  
For illumination of paths, beds and terraces in private applications.

### Product description

Luminaire made of aluminium profile, aluminium alloy, aluminium and stainless steel  
BEGA Unidure® coating technology  
Antique glass  
Silicone gasket  
Luminaire with mounting plate for bolting onto a foundation or an anchorage unit  
Mounting plate with two pitch circles:  
ø 70 mm, 3 elongated holes 7 mm wide  
ø 100 mm, 3 elongated holes 9 mm wide  
Connection box for through-wiring  
– for 2 cables up to 5 × 2,5<sup>2</sup>  
Fuse terminal with micro fuse  
6.3 A slow ø 5 × 20 mm  
Lampholder E 27  
Safety class I  
Protection class IP 64  
Dust-tight and protection against splash water  
Impact strength IK02  
Protection against mechanical impacts < 0.2 joule  
CE – Conformity mark  
Weight: 6.4 kg

### Lamp


Luminaire with lampholder E 27  
Lamp output max. 60 W

For this luminaire we recommend the following BEGA LED lamps:

**13 510** LED 7 W · 805 lm · 2700 K  
**13 548** LED 7 W · 805 lm · 2700 K  
dimmable

**13 584** LED 7 W · 805 lm · 3000 K  
**13 586** LED 7 W · 805 lm · 3000 K  
dimmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

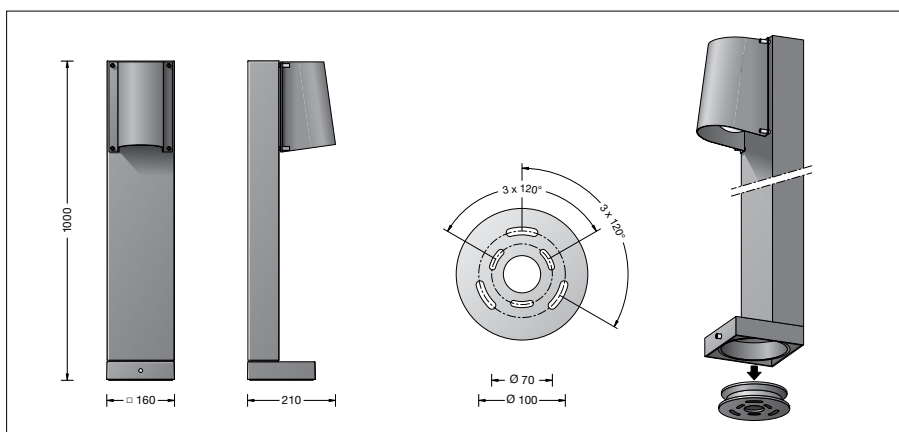

### Accessory

**70 895** Anchorage unit  
with mounting flange made of hot-dip galvanised steel. Total length 400 mm.  
3 stainless steel fixing screws M8.  
Pitch circle ø 100 mm.

See the separate instructions for use.