

BEGA**84 236**

Light design element

IP 65

Project · Reference number

Date

Product data sheet**Application**

Light design elements with genuine Kebony Clear wood seating for structuring and dividing areas and spaces in both the public and private sectors. Symmetrical wide beam light emission below the horizontal plane.

Product description

The luminaire consists of aluminium profiles, cast aluminium and stainless steel
 Genuine Kebony Clear wood seating
 Matt safety glass
 2 Mounting plates with 2 elongated holes, width 10 mm, 250 mm spacing
 Connection box with cable entries for through-wiring of mains supply cable up to \varnothing 18 mm max. $5 \times 2.5^{\square}$
 Connecting terminals $5 \times 4^{\square}$
 Earth conductor connection
 LED power supply unit
 220-240 V \sim 0/50-60 Hz
 DC 176-280 V
 DALI controllable
 A basic isolation exists between power cable and control line
 Safety class I
 Protection class IP 65
 Dust-tight and protection against water jets
 Impact strength IK08
 Protection against mechanical impacts < 5 joule
CE – Conformity mark
 Weight: 47.0 kg

Inrush current

Inrush current: 5 A / 50 μ s
 Maximum number of luminaires of this type per miniature circuit breaker:
 B10A: 31 luminaires
 B16A: 50 luminaires
 C10A: 52 luminaires
 C16A: 85 luminaires

Lamp

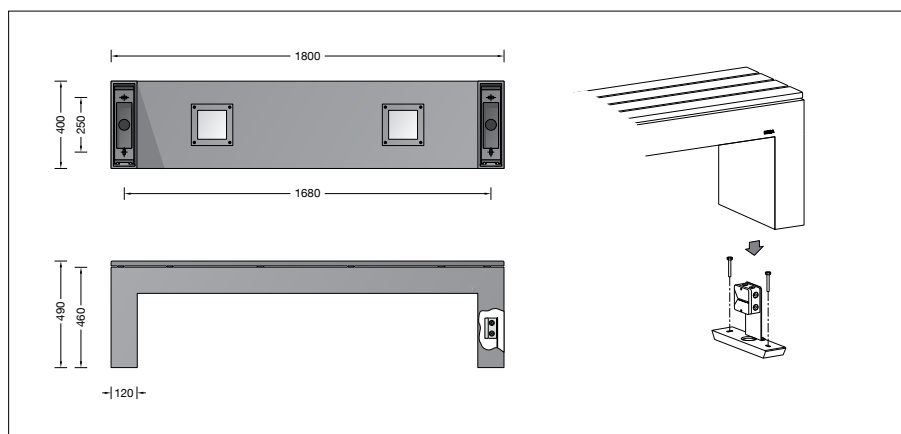
Module connected wattage	2x 5.6 W
Luminaire connected wattage	14.8 W
Rated temperature	$t_a = 25^{\circ}\text{C}$
Ambient temperature	$t_{a, \text{max}} = 40^{\circ}\text{C}$

84 236 K3

Module designation	2x LED-0357/830
Colour temperature	3000 K
Colour rendering index	CRI > 80
Module luminous flux	2330 lm
Luminaire luminous flux	1108 lm
Luminaire luminous efficiency	74,9 lm/W

84 236 K4

Module designation	2x LED-0357/840
Colour temperature	4000 K
Colour rendering index	CRI > 80
Module luminous flux	2390 lm
Luminaire luminous flux	1148 lm
Luminaire luminous efficiency	77,6 lm/W

**Service life · Ambient temperature**

Ambient temperature $t_a = 25^{\circ}\text{C}$	
LED psu:	> 50,000 h
LED module:	> 200,000 h (L.80 B.50)
	100,000 h (L.90 B.50)

Ambient temperature $t_a = 40^{\circ}\text{C}$	
LED psu:	50,000 h
LED module:	> 200,000 h (L.80 B.50)
	100,000 h (L.90 B.50)

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Article No. 84 236

LED colour temperature optionally 3000 K or 4000 K
 3000 K – Article number + **K3**
 4000 K – Article number + **K4**

Colour graphite or silver
 graphite – article number
 silver – article number + **A**