

BEGA**84 259**

Floodlight

 IP 65

Project · Reference number

Date

Product data sheet

Application

Floodlight with broad spread light distribution for permanent installations on a wall, under a ceiling or on a pillar.

For floodlighting plants, walls and other surfaces and for various lighting tasks in the private sector.

Product description

Floodlight made of glass-fibre reinforced polyamide

Clear safety glass

Silicone gasket

Reflector made of pure anodised aluminium

Toolless relamping

No tools are needed to adjust the operating position

Swivel range $-30^{\circ}/+70^{\circ}$

Rotation range of floodlight 325°

Mounting box with 2 fixing holes

$\varnothing 5 \text{ mm} \cdot 60 \text{ mm}$ spacing

2 cable entries for through-wiring of mains

supply cable $\varnothing 7\text{-}10.5 \text{ mm}$,

max. $3 \text{ G } 1.5^{\square}$

Connecting terminals 2.5^{\square}

Lampholder E 27

Safety class II 

Protection class IP 65

Dust-tight and protection against water jets

Impact strength IK07

Protection against mechanical

impacts $< 2 \text{ joule}$

CE – Conformity mark

Weight: 0.85 kg

Lighting technology

Half beam angle 93°

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and interior lighting as well as luminaire data in EULUMDAT and IES format are available on our website www.bega.com.

Lamp

Luminaire with lampholder E 27

Lamp output max. 40 W

inclusive BEGA LED lamp 13512


LED 8 W

1055 lm

Colour temperature

2700 K

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

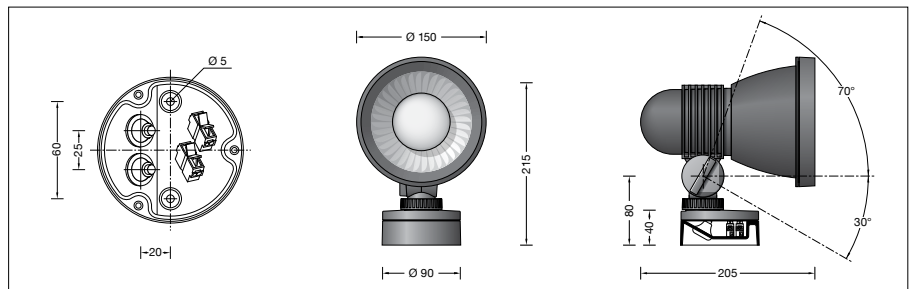

Light distribution

