

BEGA**84 324**

Garden and pathway luminaire

IP 65

Project · Reference number

Date

Product data sheet

Application

Unshielded LED garden and path luminaire with safety guard. Light exit 360°. With hand-blown, three-ply opal glass and pleasantly uniform light effect for effective illumination in private gardens.

Product description

Luminaire made of cast aluminium, aluminium and stainless steel
 BEGA Unidure® coating technology
 Opal glass with screw neck
 Silicone gasket
 Luminaire with anchorage unit for fixing in the soil
 The anchorage unit is made of galvanised steel according to EN ISO 1461
 Mounting bracket with connection box and 3-pole terminal 4[□] for connection of mains supply cable max. 3 × 2.5[□]
 Lampholder E 14
 Safety class I
 Protection class IP 65
 Dust-tight and protection against water jets
 Impact strength IK07
 Protection against mechanical impacts < 2 joule
CE – Conformity mark
 Weight: 5.1 kg

Lamp

Luminaire with lampholder E 14
 Lamp output max. 40 W

For this luminaire we recommend the following BEGA LED lamps:

13 552 LED 4 W · 470 lm · 2700 K

13 554 LED 5 W · 470 lm · 2700 K
 dimmable

13 594 LED 4 W · 470 lm · 3000 K


13 596 LED 5 W · 470 lm · 3000 K
 dimmable

Radio-controlled version (Zigbee 3.0):

13 558 LED 2,3 W · 470 lm · 2700 K
 dimmable

13 559 LED 5,8 W · 470 lm · 2700-6500 K
 dimmable · tunable white

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

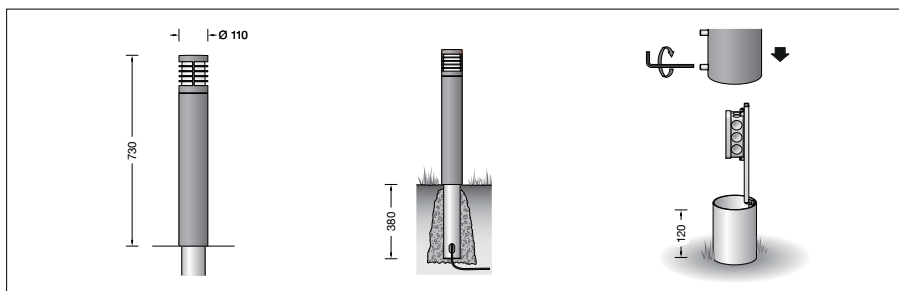

Article No. 84 324

Colour graphite or silver
 graphite – article number
 silver – article number + **A**

Light distribution

