

BEGA**84 325**

Garden and pathway luminaire

IP 65

Project · Reference number

Date

Product data sheet

Application

Unshielded LED garden and path luminaire with safety guard. Light exit 360°. With hand-blown, three-ply opal glass and pleasantly uniform light effect for effective illumination in private gardens.

Product description

Luminaire made of cast aluminium, aluminium and stainless steel
Opal glass with screw neck
Silicone gasket
Luminaire with anchorage unit for fixing in the soil
The anchorage unit is made of galvanised steel according to EN ISO 1461
Mounting bracket with connection box and 3-pole terminal 4² for connection of mains supply cable max. 3 × 2.5²
Lampholder E 27
Safety class I
Protection class IP 65
Dust-tight and protection against water jets
Impact strength IK09
Protection against mechanical impacts < 10 joule
CE – Conformity mark
Weight: 8.2 kg

Lamp

Luminaire with lampholder E 27
Lamp output max. 60 W


For this luminaire we recommend the following BEGA LED lamps:

- 13510** LED 7 W · 805 lm · 2700 K
13548 LED 7 W · 805 lm · 2700 K dimmable
13584 LED 7 W · 805 lm · 3000 K
13586 LED 7 W · 805 lm · 3000 K dimmable
13512 LED 8 W · 1055 lm · 2700 K
13588 LED 8 W · 1055 lm · 3000 K

Radio-controlled version (Zigbee 3.0):

- 13555** LED 9 W · 805 lm · 2700 K dimmable
13556 LED 9 W · 805 lm · 2700-6500 K dimmable · tunable white
13557 LED 9.5 W · 805 lm · 2700-6500 K dimmable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

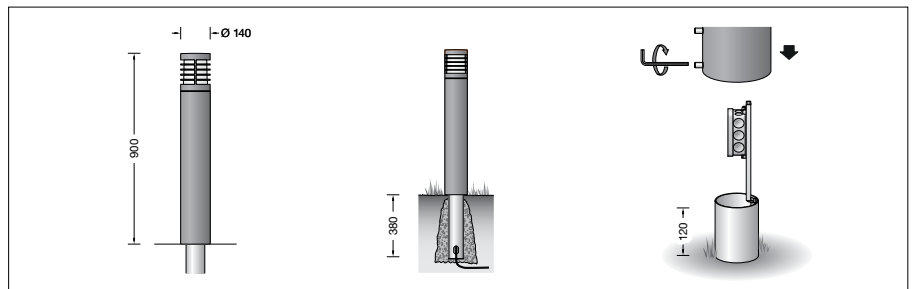

Article No. 84 325

Colour graphite or silver
graphite – article number
silver – article number + **A**

Light distribution

