

BEGA**84 365**

Floodlight



Project · Reference number

Date

Product data sheet

Application

LED floodlight with earthspike, connecting cable and safety plug for portable installation.

Product description

Floodlight made of aluminium alloy,
aluminium and stainless steel
BEGA Unidure® coating technology
Earth spike made of UV-resistant glass - fibre
reinforced polyamide synthetic
Clear safety glass
Silicone gasket
Reflector made of pure anodised aluminium
Swivel range $-30^{\circ}/+60^{\circ}$
Ready for connection with
5 m connecting cable H05RN-F 3 G 1[□]
and mains plug.
LED power supply unit
220-240 V \sim 0/50-60 Hz
Safety class I
Protection class safety plug IP X4
Protected against splash water
Protection class luminaire IP 65
Dusttight and protected against water jets
Impact strength IK07
Protection against mechanical
impacts < 2 joule
 – Safety mark
CE – Conformity mark
Weight: 2.4 kg

Light technique

Broad spread light distribution.
Half beam angle 43°
By changing the diffuser lense it is possible to
alter the symmetrical light distribution into a flat
beam light distribution.
Luminaire data for the light planning program
DIALux for outdoor lighting, street lighting and
indoor lighting, as well as luminaire data in
EULUMDAT and IES format are available on the
BEGA website at www.bega.com.

Lamp


Module connected wattage	19.2 W
Luminaire connected wattage	21.6 W
Rated temperature	$t_a = 25^{\circ}\text{C}$
Ambient temperature	$t_{a\text{max}} = 50^{\circ}\text{C}$

84 365 K4

Module designation	LED-0638/940
Colour temperature	4000 K
Colour rendering index	CRI > 90
Module luminous flux	2340 lm
Luminaire luminous flux	1775 lm
Luminaire luminous efficiency	82,2 lm/W

84 365 K3

Module designation	LED-0638/930
Colour temperature	3000 K
Colour rendering index	CRI > 90
Module luminous flux	2260 lm
Luminaire luminous flux	1715 lm
Luminaire luminous efficiency	79,4 lm/W

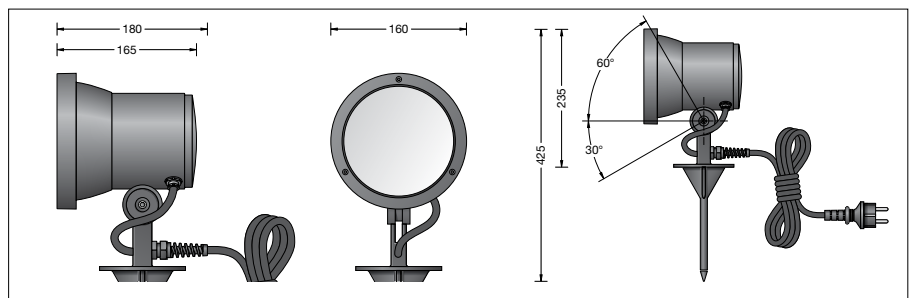

Service life · Ambient temperature

Rated temperature $t_a = 25^{\circ}\text{C}$	
LED psu:	> 50,000 h
LED module:	> 200,000 h (L 80 B 50) 100,000 h (L 90 B 50)

Ambient temperature $t_{a\text{max}} = 50^{\circ}\text{C}$ (100 %)	
LED psu:	50,000 h
LED module:	70,000 h (L 80 B 50) 100,000 h (L 70 B 50)

Article No. 84 365

LED colour temperature optionally 4000 K
or 3000 K
4000 K – Article number + **K4**
3000 K – Article number + **K3**

Colour graphite or silver
graphite – article number
silver – article number + **A**

Accessories

70 757 Shield
70 060 Exchangeable lens flat beam

Permanent connecting pillar
70 375 with 2 socket outlets
70 376 with 1 socket outlet + 1 switch
70 377 with 4 socket outlets
70 378 with 3 socket outlets + 1 switch

For the accessories a separate instructions
for use can be provided upon request.

Light distribution

