

**BEGA****84 432**

Garden and pathway luminaire

IP 65

Project · Reference number

Date

**Product data sheet****Application**

Unshielded LED garden and path luminaire with safety guard. Light exit 360°.  
With hand-blown, three-ply opal glass and pleasantly uniform light effect for effective illumination in private gardens.

**Product description**

Luminaire made of cast aluminium, aluminium and stainless steel  
Opal glass with screw neck  
Silicone gasket  
Luminaire with mounting base made of hot-dip galvanised steel according to EN ISO 1461 for bolting onto a foundation provided by the customer or on other paved surfaces such as terraces and paving stones  
Base plate with 3 fixing holes  
ø 9 mm · Pitch 120° · Pitch circle ø 65 mm  
Mounting bracket with connection box and 3-pole terminal 4<sup>□</sup> for connection of mains supply cable max. 3 × 2.5<sup>□</sup>  
Lampholder E 27  
Safety class I  
Protection class IP 65  
Dust-tight and protection against water jets  
Impact strength IK09  
Protection against mechanical impacts < 10 joule  
CE – Conformity mark  
Weight: 6.8 kg

**Lamp**

Luminaire with lampholder E 27  
Lamp output max. 60 W

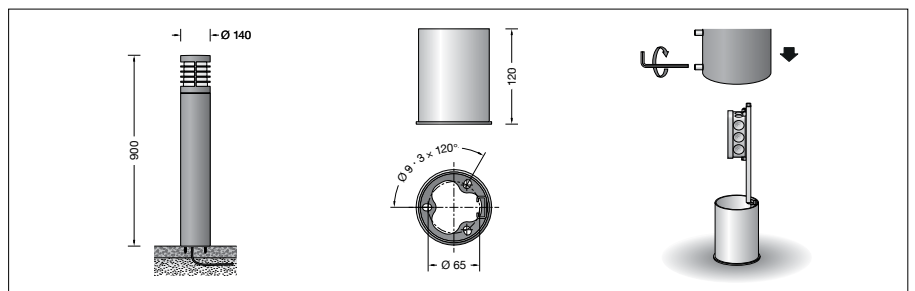
For this luminaire we recommend the following BEGA LED lamps:

- 13510** LED 7 W · 805 lm · 2700 K  
**13548** LED 7 W · 805 lm · 2700 K dimmable  
**13584** LED 7 W · 805 lm · 3000 K  
**13586** LED 7 W · 805 lm · 3000 K dimmable  
**13512** LED 8 W · 1055 lm · 2700 K  
**13588** LED 8 W · 1055 lm · 3000 K

Radio-controlled version (Zigbee 3.0):

- 13555** LED 9 W · 805 lm · 2700 K dimmable  
**13556** LED 9 W · 805 lm · 2700-6500 K dimmable · tunable white  
**13557** LED 9.5 W · 805 lm · 2700-6500 K dimmable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

**Article No. 84 432**

Colour graphite or silver  
graphite – article number  
silver – article number + **A**

**Light distribution**