

BEGA**88 632**

Bollard

IP 55

Project · Reference number

Date

Product data sheet

Application

Bollard with narrow beam, rotationally symmetrical light output for lighting of paths, flower-beds and terraces.
The fitted cylindrical lens made of crystal glass concentrates the light horizontally.

Product description

Luminaire made of aluminium alloy, aluminium and stainless steel
BEGA Unidure® coating technology
Optical cylindrical lens made of crystal glass
Silicone gasket
Luminaire with mounting plate for bolting onto a foundation or an anchorage unit
Mounting plate with two pitch circles:
ø 70 mm, 3 elongated holes 7 mm wide
ø 100 mm, 3 elongated holes 9 mm wide
Luminaire can be aligned on the mounting plate around 360°
Mounting bracket with connection box 70 632 for through-wiring – for 2 cables up to 5 × 4² with fuse Neozed D 01 · 6 A
Lampholder E 27
Safety class I
Protection class IP 55
Dust-tight and protected against water jets
CE – Conformity mark

Lamp

Luminaire with lampholder E 27
Lamp output max. 100 W

For this luminaire we recommend the following BEGA LED lamps:

13 512 LED 8 W · 1055 lm · 2700 K

13 564 LED 12 W · 1400 lm · 2700 K


13 565 LED 12 W · 1400 lm · 2700 K
dimmmable

13 588 LED 8 W · 1055 lm · 3000 K

13 590 LED 12 W · 1400 lm · 3000 K

13 592 LED 12 W · 1400 lm · 3000 K
dimmmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

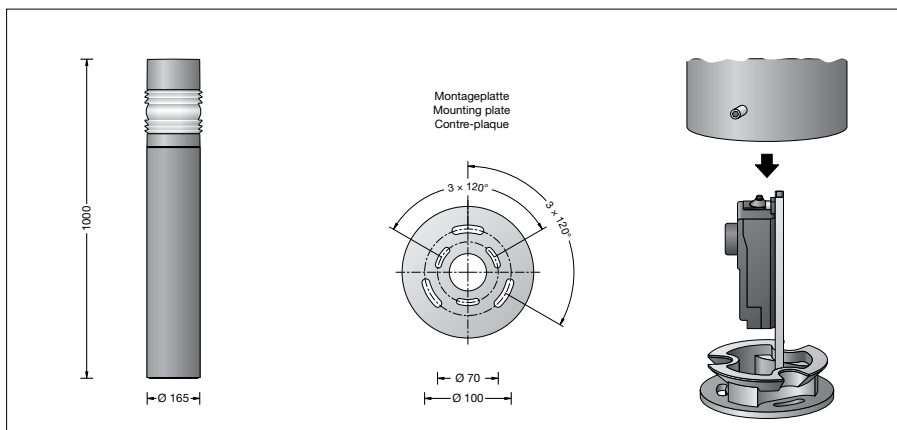

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Accessory

70 895 Anchorage unit with mounting flange made of hot-dip galvanised steel. Total length 400 mm. 3 stainless steel fixing screws M8. Pitch circle ø 100 mm.

See the separate instructions for use.