

**GLASHÜTTE LIMBURG****Product data sheet****Wall luminaire****8660**

Project · Reference number

Date

**Application**

Enclosed and free-radiating wall luminaire with crystal glass and metal fitter. For all lighting tasks in interior applications. They are ideal for places where a soft and uniform lighting distribution is required.

**Product description**

Metal housing, finish white enamel

Crystal glass, inside white

2 fixing holes  $\varnothing$  5.5 mm,  
180 x 46 mm spacing

1 cable entry for mains supply cable  
up to  $\varnothing$  10.5 mm max. 3 x 1.5<sup>2</sup>

Connecting terminal 2.5<sup>2</sup>

Earth conductor connection

Lampholder GX 24 q-2


Electronic ballast (EEI=A2 BAT)


220-240 V  $\sim$  0/50-60 Hz

DC 176-264 V

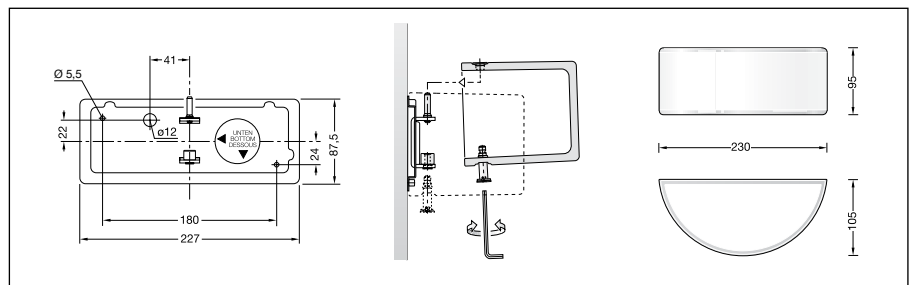
DC Start  $\geq$  198 V

Safety class I

 – Safety mark

 – Conformity mark

Weight: 1.4 kg


[www.glashuette-limburg.com](http://www.glashuette-limburg.com)
**Lamp**

Compact fluorescent lamp

TC-TELI 18 W · GX 24 q-2

Osram: Dulux T/E Plus 18 W / ... 1200 lm

Philips: PL-T TOP 18 W / 4p 1200 lm

Please note the lamp manufacturers' operating instructions.