

**GLASHÜTTE LIMBURG**

Product data sheet

Wall luminaire

**89 661**

Project · Reference number

Date

**Application**

Enclosed and free-radiating wall luminaire with crystal glass and metal fitter. For all lighting tasks in interior applications. They are ideal for places where a soft and uniform lighting distribution is required.

**Product description**

Metal housing, finish white enamel

Crystal glass, inside white

2 fixing holes  $\varnothing$  4.5 mm

219 mm spacing

2 cable entries for through-wiring for mains

cable up to  $\varnothing$  10.5 mm max.  $3 \times 1.5$

Connecting terminal 2.5

Earth conductor connection

Lampholder GX 24 q-3

Electronic ballast (EEI=A2)

220-240 V  $\sim$  0/50-60 Hz

DC 176-264 V

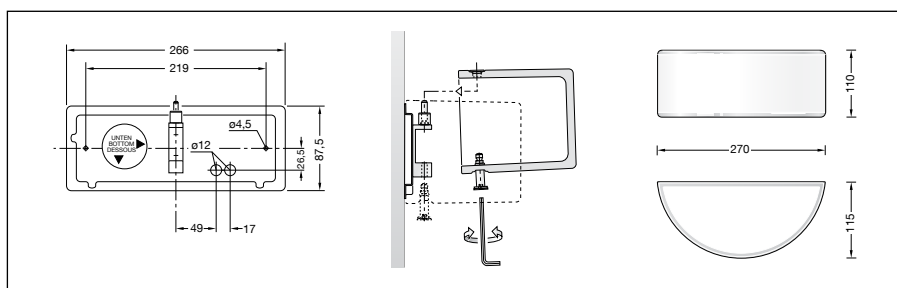
DC Start  $\geq$  198 V

Safety class I

– Safety mark

– Conformity mark

Weight: 1.9 kg


[www.glashuette-limborg.com](http://www.glashuette-limborg.com)
**Lamp**

Compact fluorescent lamp

TC-TELI 26 W · GX 24 q-3

Osram: Dulux T/E Plus 26 W / ... 1800 lm

Philips: PL-T TOP 26 W / 4p 1800 lm

Please note the lamp manufacturers' operating instructions.