

**GLASHÜTTE LIMBURG**

Product data sheet

Wall luminaire

**8662**

Project · Reference number

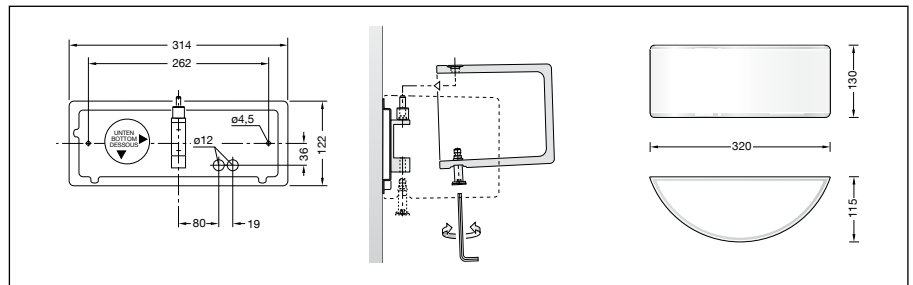
Date

**Application**

Enclosed and free-radiating wall luminaire with crystal glass and metal fitter. For all lighting tasks in interior applications. They are ideal for places where a soft and uniform lighting distribution is required.

**Product description**

Metal housing, finish white enamel  
 Crystal glass, inside white  
 2 fixing holes  $\varnothing$  4.5 mm,  
 262 mm spacing  
 2 cable entries for mains  
 cable up to  $\varnothing$  10.5 mm max. 3 x 1.5<sup>□</sup>  
 Connecting terminal 2.5<sup>□</sup>  
 Earth conductor connection  
 Lampholder GX 24 q-3/4  
 Electronic ballast (EEI=A2)  
 220-240 V  $\sim$  0/50-60 Hz  
 DC 176-280 V  
 DC Start  $\geq$  198 V  
 Safety class I  
 – Safety mark  
 – Conformity mark  
 Weight: 2.5 kg


[www.glashuette-limborg.com](http://www.glashuette-limborg.com)
**Lamp**

Compact fluorescent lamp  
 TC-TELI 26·32·42W · GX 24 q-3/4

Osram:

Dulux T/E Plus 26 W /...	1800 lm
Dulux T/E Plus 32 W /...	2400 lm
Dulux T/E Plus 42 W /...	3200 lm

Philips:

PL-T 26 W/4p	1800 lm
PL-T 32 W/4p	2400 lm
PL-T 42 W/4p	3200 lm

Please note the lamp manufacturers' operating instructions.