

BEGA**89 767**

Ceiling and wall luminaire for indoor use



Project · Reference number

Date


Product data sheet

Application

Ceiling and wall luminaire · indoor luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks. They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class.

Product description

Metal housing,
finish white enamel
Hand-blown opal glass, satin matt,
with sliding-bolt closure
2 fixing holes \varnothing 5.5 mm
200 mm spacing
2 cable entries for through-wiring for mains
cable up to \varnothing 10.5 mm max. 3×1.5^2
Connecting terminal 2.5^2
Earth conductor connection
Lampholder GX 24 q-3
Electronic ballast (EEL=A2)
220-240 V \sim 0/50-60 Hz
DC 176-264 V
DC Start \geq 198 V
Safety class I
Protection class IP 44
Protected against granular foreign bodies
> 1 mm and splash water
 – Safety mark
 – Conformity mark
Weight: 2.3 kg

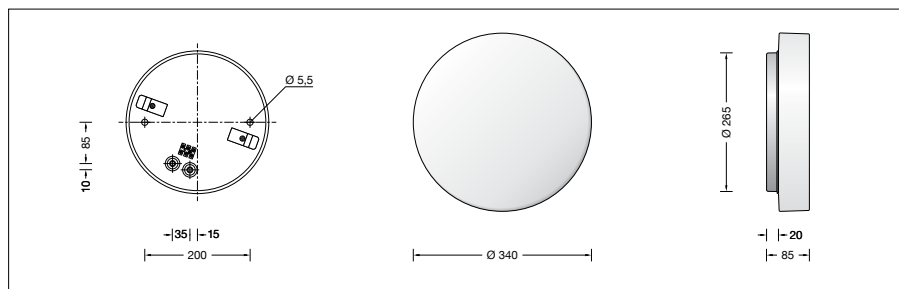

Lamp

Compact fluorescent lamp
TC-TELI 26 W · GX 24 q-3

Osram: Dulux T/E Plus 26 W / ... 1800 lm
Philips: PL-T TOP 26 W / 4p 1800 lm

Please note the lamp manufacturers' operating instructions.

Article No. 89 767

If the article number is followed by a **P**, we can also supply luminaires in tough synthetic material.