

**BEGA****89 767 P**

Ceiling and wall luminaire for indoor use



Project · Reference number

Date

## Product data sheet

### Application


Ceiling and wall luminaire made of impact resistant synthetic diffuser, and metal housing, for all lighting tasks in interior applications. They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class.

### Product description

Metal housing,  
finish white enamel  
Impact resistant synthetic diffuser, white,  
with sliding-bolt closure  
2 mounting holes  $\varnothing$  5.5 mm  
Distance apart 200 mm  
2 cable entries for through-wiring for mains  
cable up to  $\varnothing$  10.5 mm max.  $3 \times 1.5^{\square}$   
Connecting terminals  $2.5^{\square}$   
Earth conductor terminal  
Lampholder GX 24 q-3  
Electronic ballast (EEL=A2)  
220-240 V  $\sim$  0/50-60 Hz  
DC 176-264 V  
DC Start  $\geq$  198 V  
Safety class I  
Protection class IP 44  
Protected against granular foreign bodies  
> 1 mm and splash water  
 – Safety mark  
 – Conformity mark  
Weight: 2.3 kg

### Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page [www.bega.com](http://www.bega.com).

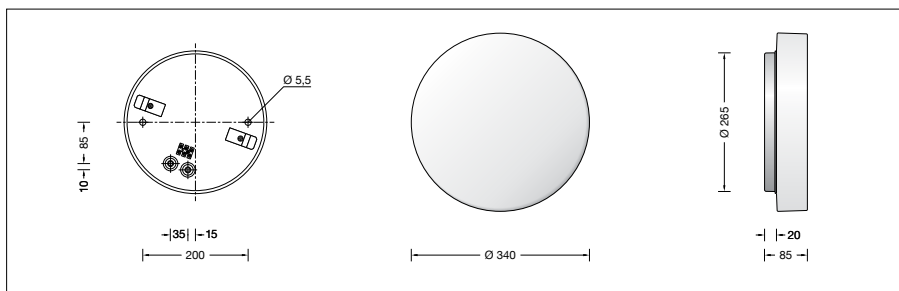

### Lamp

Compact fluorescent lamp  
TC-TELI 26 W · GX 24 q-3

Osram: Dulux T/E Plus 26 W / ... 1800 lm  
Philips: PL-T TOP 26 W / 4p 1800 lm

Please note the lamp manufacturers' operating instructions.