

**GLASHÜTTE LIMBURG****Product data sheet****Wall luminaire****8874**

Project · Reference number

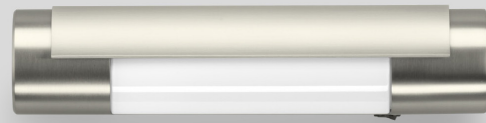
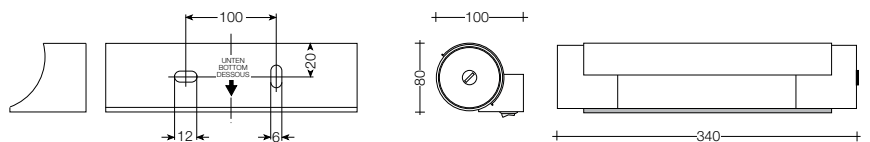
Date

**Application**

Wall luminaire made of hand-blown opal glass, with metal housing.  
 The light aperture can be adjusted infinitely by rotating the shield around its longitudinal axis.  
 Light aperture 120°; adjustable.

**Product description**

Die-cast aluminium and aluminium fitter, finish stainless steel  
 Hand-blown opal glass  
 No tools are required for relamping  
 2 mounting holes  $\varnothing$  6 mm  
 Elongated holes · 100 mm spacing  
 Connecting terminal 2.5<sup>□</sup>  
 Earth conductor connection  
 Lampholder G 24 q-2  
 Electronic ballast (EEI=A2 BAT)  
 220-240 V  $\sim$  0/50-60 Hz  
 DC 176-264 V  
 DC Start  $\geq$  198 V  
 Safety class I  
 – Safety mark  
 – Conformity mark  
 Weight: 1.2 kg


[www.glashuette-limburg.com](http://www.glashuette-limburg.com)
**Lamp**

Compact fluorescent lamp  
 TC-DEL 18 W · G 24 q-2

Osram: Dulux D/E 18 W 1200 lm  
 Philips: PL-C 18 W/4p 1200 lm

Please note the lamp manufacturers' operating instructions.