

**BEGA****99 526**

Underwater floodlight

IP 68

Project · Reference number

Date

**Product data sheet****Application**

Water pressure tight LED underwater floodlight with very shallow construction form for the illumination of ponds, water pools and water features up to a depth of 4 metres.

The floodlight must only be operated under water and must be protected against freezing in. To avoid damages on the surface of the floodlight, the water should have a neutral pH-value and should be free from metal attacking ingredients.

**Product description**

Luminaire made stainless steel  
Steel grade no. 1.4301 – electro polished  
Swivel range 90°  
Fixing bracket with 1 hole  $\varnothing$  7 mm  
Complete with installed connecting cables:  
Power supply unit with 2 m mains supply cable  
05RN8-F 2 x 1<sup>□</sup> and power plug  
Power supply unit – Luminaire:  
4 m water-resistant cable 05RN8-F 2 x 1<sup>□</sup>  
Sheathing colour blue  
Luminaire – Luminaire: 2 m water-resistant  
cable 05RN8-F 2 x 1<sup>□</sup>  
Sheathing colour blue

Safety transformer according to VDE 0551,  
EN 62558 part 2-6/VDE 0570 with integrated  
overload protection  
Primary voltage 230 V AC 50 Hz  
Secondary voltage 24 V DC · 50 W · 2,08 A  
Safety class II  $\square$   
Protection class IP 66  
Protected against dust and heavy downpours  
Transformer with power plug  
Protection class IP X4  
Luminaire: Safety class III  $\diamond$   
Protection class IP 68 4 m  
Protected against dust  
**CE** – Conformity mark  
Weight: 4.5 kg

**Lamp**

Module connected wattage  
Luminaire connected wattage  
Rated temperature  
Ambient temperature  
Voltage

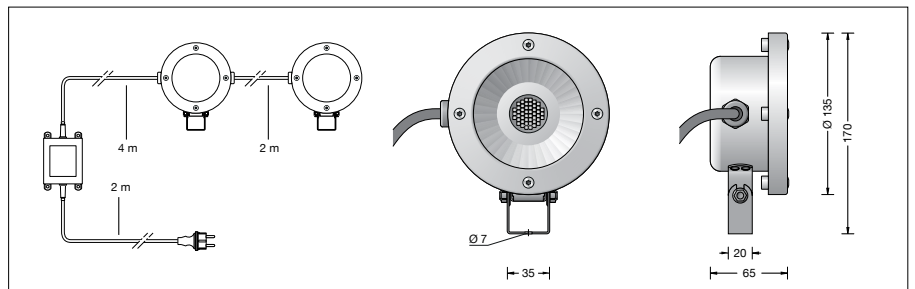
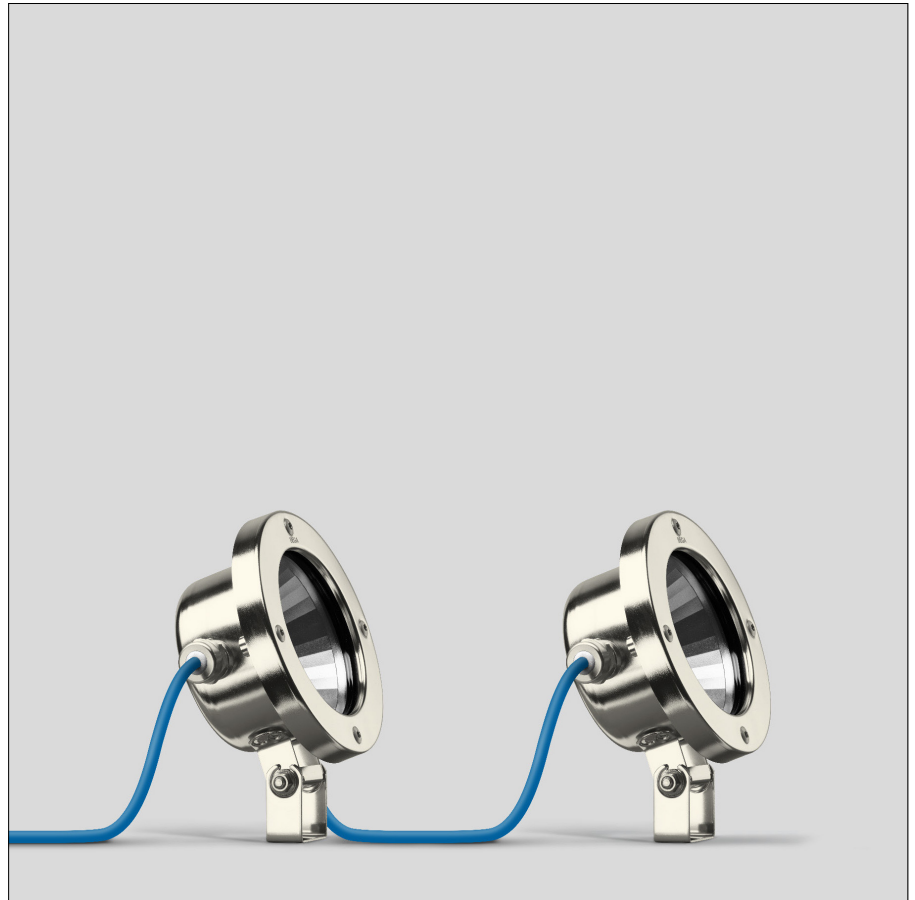
11.8 W  
40 W  
 $t_a = 25$  °C  
 $t_{a,max} = 60$  °C  
24 V = DC

**99 526 K3**

Module designation  
Colour temperature  
Colour rendering index  
Module luminous flux  
Luminaire luminous flux\*  
Luminaire luminous efficiency\*

LED-0401/830  
3000 K  
CRI > 80  
4280 lm  
2504 lm  
62,6 lm/W

\* preliminary data

**Service life of the LED**

Ambient temperature  $t_a = 25$  °C  
– at > 500,000h: L70B50

max. ambient temperature  $t_a = 60$  °C  
– at 139,000h: L70B50

**Light technique**

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT and IES-format you will find on the BEGA web page [www.bega.com](http://www.bega.com).  
The details apply to free burning floodlights.  
The lighting intensity is depending on the submerged depth of the floodlight and on the purity of the water.

**Light distribution**