

THE BLACK LINE NO TRIM 12 SPOTS

Number of heads	1
Mounting	Ceiling recessed
Lamps description	Power LED 39W 12 x 200 lm 3000K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	No Trim version can be connected in a continuous line.

OPTICAL


Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	11° Spot

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class III

PHYSICAL


Length (mm)	990
Recessed depth (mm)	71
Construction material	Extruded aluminum
Weight (kg)	3,41

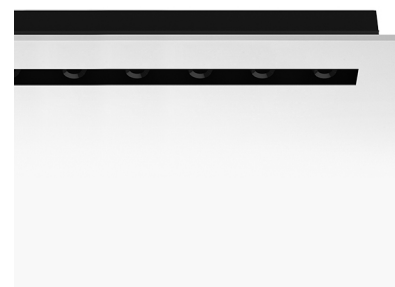

The Black Line No Trim 12 Spots
designed by FLOS Architectural

Recessed integrated luminaire with 12 LED lighting spots. 1050 mA remote power supply not included.

03.0062.14.ANT - 2330lm Black

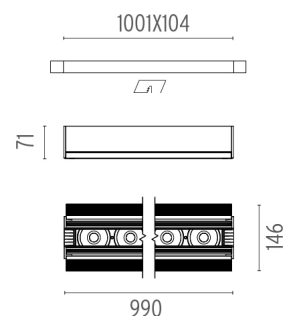

CERTIFICATIONS



The Black Line No Trim 12 Spots . Accessories

Power Supply



60.8530

Constant Current Power Supply for LED. 25-50W

Continuous current power supply
of 25-50W, 220/240V - 50/60Hz
with power current selected
through adjustable
350/500/550/650/700/750/850/
900/1050mA Dali switch, 1-10V
switch or push dimming.

Maximum length of 1.5 mm²
secondary conductor (m): 10

Maximum length of 2.5 mm²
secondary conductor (m): 15


60.8988

Constant Current Power Supply for LED. 45W

Non dimmable continuous current power supply of 45W, 220/240V - 50/60Hz with power current selected through adjustable 800/900/1050 mA switch.

Maximum length of 1.5 mm² secondary conductor (m): 20


Maximum length of 2.5 mm²
secondary conductor (m): 30

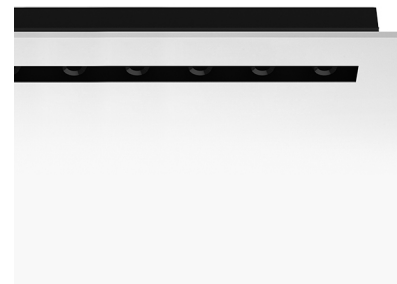

The Black Line No Trim 12 Spots
designed by FLOS Architectural

Recessed integrated luminaire with 12 LED lighting spots. 1050 mA remote power supply not included.

● 03.0062.14.ANT - 2330lm Black

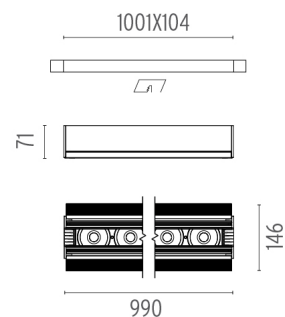

The Black Line No Trim 12 Spots . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED

CERTIFICATIONS

