

## LED CURTAIN 600 MM

Number of heads	1
Mounting	Ceiling recessed
Lamps description	Power LED 17,3W 2000 lm 3000K CRI 90
Luminaire luminous flux	See reference number
Voltage (V)	24
Environment	Indoor
Notes	12 LEDs

### OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	13° / 53°

### ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class III

### PHYSICAL


Length (mm)	600
Construction material	Extruded aluminum
Weight (kg)	1,20




**LED Curtain 600 mm**  
designed by FLOS Architectural

Embedded luminaire for direct lighting with LED. Elliptical lens 15°x50° incorporated. Remote transformer not included.

03.3902.30C - 906lm White

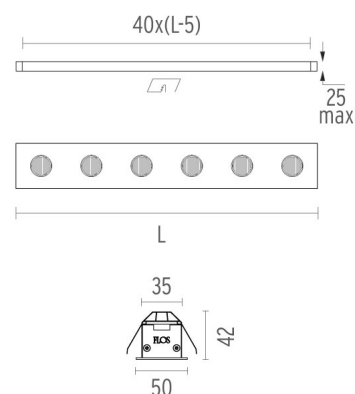

### CERTIFICATIONS

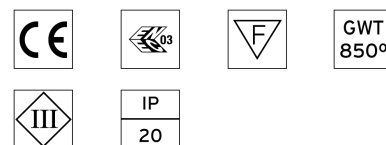

## LED Curtain 600 mm . Accessories

### Power Supply



60.8495

**Electronic transformer with constant voltage (24V) for LED. 20W**  
Electronic transformer with constant voltage (24V) for LED. 100/240V.

Maximum lenght of 1.5 mm2 secondary conductor (m): 5



60.8496

**Electronic transformer with constant voltage (24V) for LED. 60W**  
Electronic transformer with constant voltage (24V) for LED. 100/240V.

Maximum lenght of 1.5 mm2 secondary conductor (m): 5



60.8497

**Electronic transformer with constant voltage (24V) for LED. 100W**  
Electronic transformer with constant voltage (24V) for LED. 100/240V.

Maximum lenght of 1.5 mm2 secondary conductor (m): 5

Maximum lenght of 2.5 mm2 secondary conductor (m): 10



60.8515

**Electronic transformer with constant voltage (24V) for LED. 60W**  
Electronic transformer with constant voltage (24V) for LED. 60W. 100/240V. For independent use.


Maximum lenght of 1.5 mm2 secondary conductor (m): 5



**LED Curtain 600 mm**  
designed by FLOS Architectural

Embedded luminaire for direct lighting with LED. Elliptical lens 15°x50° incorporated. Remote transformer not included.

03.3902.30C - 906lm White

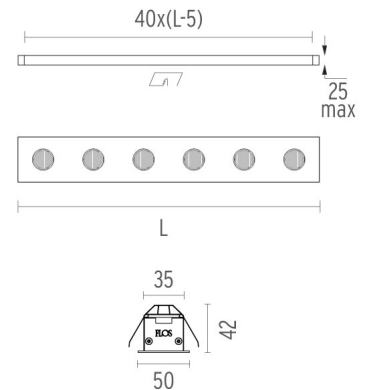

### CERTIFICATIONS



## LED Curtain 600 mm . Accessories

### Electrical



06.1032.00

#### Connection cable L: 100 mm

Connection cable between modules with Tyco fast connection cable.



06.1033.00

#### Connection cable L: 500 mm

Connection cable between modules with Tyco fast connection cable.



06.1034.00

#### Power cable L: 500 mm

Power cable with Tyco fast connection cable. Maximum supply length 3 metres.



60.8640

#### Dimmable I-10V Control Unit


Dimmable I-10V control unit with 1 channel for 24V LED modules. Power supply not included. Max. 120 W - 5A.



#### LED Curtain 600 mm designed by FLOS Architectural

Embedded luminaire for direct lighting with LED. Elliptical lens 15°x50° incorporated. Remote transformer not included.

03.3902.30C - 906lm White

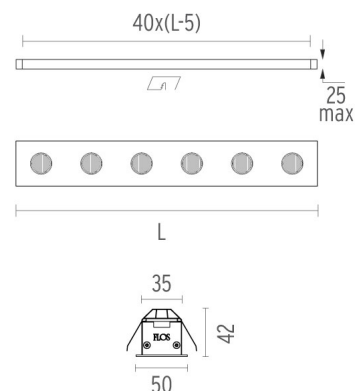

#### CERTIFICATIONS



## LED Curtain 600 mm . Lamps



### Power LED

**Lamp category:**  
LED

**Socket:**  
Special base


**Lamp type:**  
Power LED



### LED Curtain 600 mm designed by FLOS Architectural

Embedded luminaire for direct lighting with LED. Elliptical lens 15°x50° incorporated. Remote transformer not included.

03.3902.30C - 906lm White

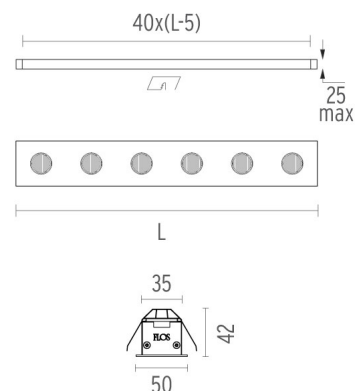

### CERTIFICATIONS

