

# FLOS

## LED SQUAD 125 MM

<b>Number of heads</b>	1
<b>Mounting</b>	Ceiling surface, Wall surface
<b>Lamps description</b>	Top LED 3W 348 lm 3000K CRI 90
<b>Luminaire luminous flux</b>	See reference number
<b>Voltage (V)</b>	24
<b>Environment</b>	Indoor
<b>Notes</b>	7 LEDs. Installation cables included: power cable 500 mm, connection cable 60 mm



## OPTICAL

<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	88°



## LED Squad 125 mm

designed by FLOS Architectural

Wall application luminaire for direct/indirect lighting with LED. Remote transformer not included.


## ELECTRICAL

<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic
<b>Emergency</b>	Without
<b>Insulation class</b>	Class III


	03.3960.29A - 234lm	Anodised aluminium
	03.3960.ANA - 234lm	Anodised aluminium / Black

## PHYSICAL

<b>Length (mm)</b>	125
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	0,37/m



## CERTIFICATIONS

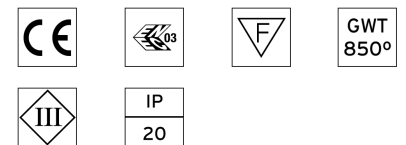

## LED Squad 125 mm . Accessories

### Power Supply



60.8495

**Electronic transformer with constant voltage (24V) for LED. 20W**

Electronic transformer with constant voltage (24V) for LED. 100/240V.

Maximum length of 1.5 mm2 secondary conductor (m): 5



60.8496

**Electronic transformer with constant voltage (24V) for LED. 60W**

Electronic transformer with constant voltage (24V) for LED. 100/240V.

Maximum length of 1.5 mm2 secondary conductor (m): 5



**LED Squad 125 mm**  
designed by FLOS Architectural

Wall application luminaire for direct/indirect lighting with LED. Remote transformer not included.

- 03.3960.29A - 234lm Anodised aluminium
- 03.3960.ANA - 234lm Anodised aluminium / Black

### Electrical



60.8640

**Dimmable I-10V Control Unit**


Dimmable I-10V control unit with 1 channel for 24V LED modules. Power supply not included. Max. 120 W - 5A.




60.8635

**Dimmable Dali control unit with 1 channel for 24V LED modules**

Power supply not included.



### CERTIFICATIONS

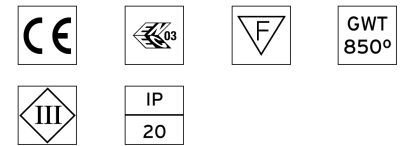

## LED Squad 125 mm . Lamps



**Top LED**

**Lamp category:**  
LED



**Socket:**  
Special base


**Lamp type:**  
Top LED



**LED Squad 125 mm**  
designed by FLOS Architectural

Wall application luminaire for direct/  
indirect lighting with LED. Remote  
transformer not included.

- |   |                     |                               |
|---|---------------------|-------------------------------|
|  | 03.3960.29A - 234lm | Anodised aluminium            |
|  | 03.3960.ANA - 234lm | Anodised aluminium /<br>Black |



### CERTIFICATIONS

