

FLOS

LED SQUAD 250 MM

Number of heads	1
Mounting	Ceiling surface, Wall surface
Lamps description	Top LED 7W 697 lm 3000K CRI 90
Luminaire luminous flux	See reference number
Voltage (V)	24
Environment	Indoor
Notes	14 LEDs. Installation cables included: power cable 500 mm, connection cable 60 mm



OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	88°



LED Squad 250 mm

designed by FLOS Architectural

Wall application luminaire for direct/indirect lighting with LED. Remote transformer not included.


ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class III


	03.3961.29A - 469lm	Anodised aluminium
	03.3961.ANA - 469lm	Anodised aluminium / Black

PHYSICAL

Length (mm)	250
Construction material	Aluminium
Weight (kg)	0,37/m



CERTIFICATIONS

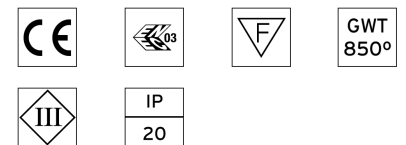

LED Squad 250 mm . Accessories

Power Supply



60.8495

Electronic transformer with constant voltage (24V) for LED. 20W

Electronic transformer with constant voltage (24V) for LED. 100/240V.

Maximum length of 1.5 mm2 secondary conductor (m): 5



60.8496

Electronic transformer with constant voltage (24V) for LED. 60W

Electronic transformer with constant voltage (24V) for LED. 100/240V.

Maximum length of 1.5 mm2 secondary conductor (m): 5



LED Squad 250 mm
designed by FLOS Architectural

Wall application luminaire for direct/indirect lighting with LED. Remote transformer not included.

- 03.3961.29A - 469lm Anodised aluminium
- 03.3961.ANA - 469lm Anodised aluminium / Black

Electrical



60.8640

Dimmable I-10V Control Unit


Dimmable I-10V control unit with 1 channel for 24V LED modules. Power supply not included. Max. 120 W - 5A.




60.8635

Dimmable Dali control unit with 1 channel for 24V LED modules

Power supply not included.



CERTIFICATIONS

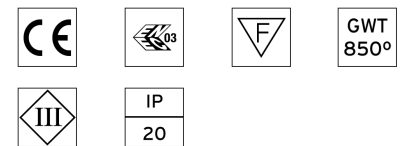

LED Squad 250 mm . Lamps



Top LED

Lamp category:
LED


Socket:
Special base


Lamp type:
Top LED



LED Squad 250 mm
designed by FLOS Architectural

Wall application luminaire for direct/
indirect lighting with LED. Remote
transformer not included.

- | | | |
|---|---------------------|-------------------------------|
|  | 03.3961.29A - 469lm | Anodised aluminium |
|  | 03.3961.ANA - 469lm | Anodised aluminium /
Black |



CERTIFICATIONS

