

FLOS

LED SQUAD 500 MM

Number of heads	1
Mounting	Ceiling surface, Wall surface
Lamps description	Top LED 13W 1394 lm 3000K CRI 90
Luminaire luminous flux	See reference number
Voltage (V)	24
Environment	Indoor
Notes	28 LEDs. Installation cables included: power cable 500 mm, connection cable 60 mm



OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	88°



LED Squad 500 mm

designed by FLOS Architectural

Wall application luminaire for direct/indirect lighting with LED. Remote transformer not included.


ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class III


	03.3962.29A - 937lm	Anodised aluminium
	03.3962.ANA - 937lm	Anodised aluminium / Black

PHYSICAL

Length (mm)	500
Construction material	Aluminium
Weight (kg)	0,37/m



CERTIFICATIONS

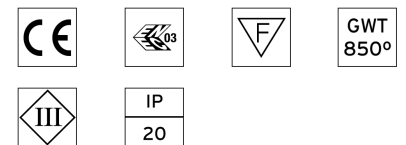

LED Squad 500 mm . Accessories

Power Supply



60.8495

Electronic transformer with constant voltage (24V) for LED. 20W

Electronic transformer with constant voltage (24V) for LED. 100/240V.

Maximum length of 1.5 mm2 secondary conductor (m): 5



60.8496

Electronic transformer with constant voltage (24V) for LED. 60W

Electronic transformer with constant voltage (24V) for LED. 100/240V.

Maximum length of 1.5 mm2 secondary conductor (m): 5



LED Squad 500 mm
designed by FLOS Architectural

Wall application luminaire for direct/indirect lighting with LED. Remote transformer not included.

- 03.3962.29A - 937lm Anodised aluminium
- 03.3962.ANA - 937lm Anodised aluminium / Black

Electrical



60.8640

Dimmable I-10V Control Unit


Dimmable I-10V control unit with 1 channel for 24V LED modules. Power supply not included. Max. 120 W - 5A.




60.8635

Dimmable Dali control unit with 1 channel for 24V LED modules

Power supply not included.



CERTIFICATIONS

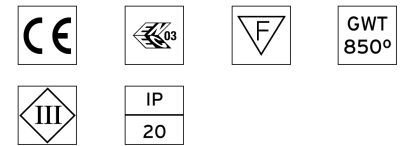

LED Squad 500 mm . Lamps



Top LED

Lamp category:
LED



Socket:
Special base

Lamp type:
Top LED



LED Squad 500 mm
designed by FLOS Architectural

Wall application luminaire for direct/
indirect lighting with LED. Remote
transformer not included.

- | | | |
|-------------------------------------------------------------------------------------|---------------------|-------------------------------|
|  | 03.3962.29A - 937lm | Anodised aluminium |
|  | 03.3962.ANA - 937lm | Anodised aluminium /
Black |



CERTIFICATIONS

