

## EASY KAP 80 SQUARE WALL-WASHER

<b>Number of heads</b>	I
<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	LED Array DC 500 mA 9,2W 698 lm 2700K CRI 90
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Environment</b>	Indoor
<b>Notes</b>	Diffusing lens included

### OPTICAL


<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Asymmetric
<b>Beam angle</b>	27°

### ELECTRICAL

<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic, Electronic dimmable, Electronic dimmable I-10V, Electronic dimmable dali
<b>Emergency</b>	Without
<b>Insulation class</b>	Class III

### PHYSICAL



<b>Recessed depth (mm)</b>	81
<b>Construction material</b>	Die-cast aluminum
<b>Weight (kg)</b>	0,24

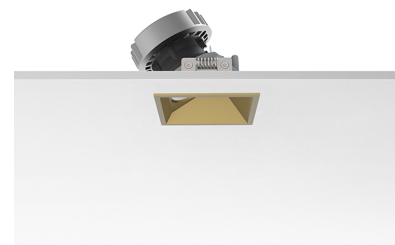

**Easy Kap 80 Square Wall-Washer**  
designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary.

03.4199.GL - 664lm	Gold
03.4199.BI - 584lm	White
03.4199.BU - 572lm	Blue
03.4199.74 - 533lm	Black
03.4199.CU - 589lm	Copper

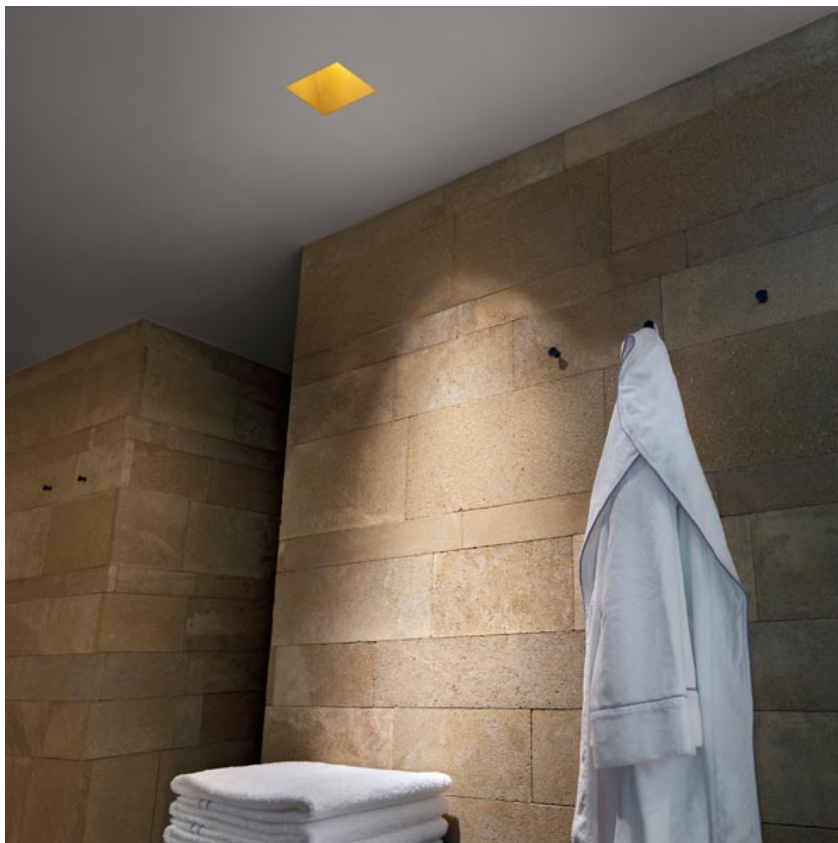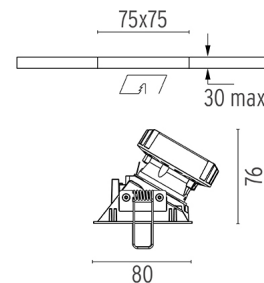

### CERTIFICATIONS



## Easy Kap 80 Square Wall-Washer . Accessories

### Power Supply



60.8534

#### Constant Current Power Supply for LED. 32W

Continuous current power supply of 32W, 230/240V - 50/60Hz with power current selected through adjustable 350/500/700 mA switch by trailing and leading edge dimming or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15



60.8533

#### Constant Current Power Supply for LED. 25W

Continuous current power supply of 25W, 120-240V - 50/60Hz with power current selected through adjustable 350/500/700mA 1-10V switch or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15



60.8847

#### Constant Current Power Supply for LED. 10-20W

Continuous current power supply of 10-20W, 110/240V - 50/60Hz with power current selected through adjustable 250/350/400/450/500/ 550/600/700 mA Dali switch. (Johnny 120 with accessories max 450 mA)

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15




60.8880

#### Constant Current Power Supply for LED. 6W-100/14W-240V

Continuous current power supply of 6W, 100V / 14W, 240V - 50/60Hz with 500 mA supply voltage.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 50


Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 50

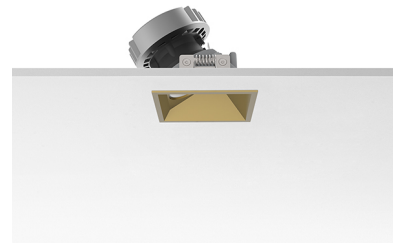

**Easy Kap 80 Square Wall-Washer**  
designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary.


03.4199.GL - 664lm	Gold
03.4199.B1 - 584lm	White
03.4199.BU - 572lm	Blue
03.4199.74 - 533lm	Black
03.4199.CU - 589lm	Copper

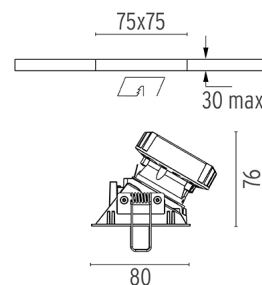

### CERTIFICATIONS



## Easy Kap 80 Square Wall-Washer . Lamps



### LED Array

### Lamp category:


LED

### Socket:

Special base



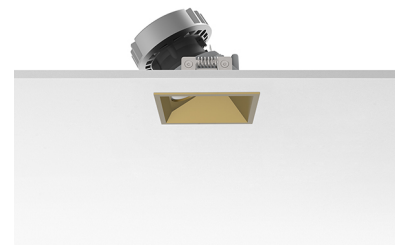


### Lamp type:


LED Array



### Easy Kap 80 Square Wall-Washer designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary.

	03.4199.GL - 664lm	Gold
	03.4199.B1 - 584lm	White
	03.4199.BU - 572lm	Blue
	03.4199.74 - 533lm	Black
	03.4199.CU - 589lm	Copper

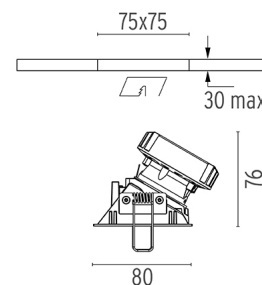

### CERTIFICATIONS

