

KAP Ø80 FIXED OPTIC FLOOD

Number of heads	1
Mounting	Ceiling recessed
Lamps description	LED Array DC 500 mA 9,2W 698 lm 2700K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Diffusing lens included. Fast&Perfect pre-installation frame to be ordered separately.

OPTICAL


Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	50°

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic, Electronic dimmable, Electronic dimmable I-10V, Electronic dimmable dali
Emergency	Without
Insulation class	Class III

PHYSICAL


Diameter (mm)	74
Recessed depth (mm)	91
Construction material	Die-cast aluminum
Weight (kg)	0,24

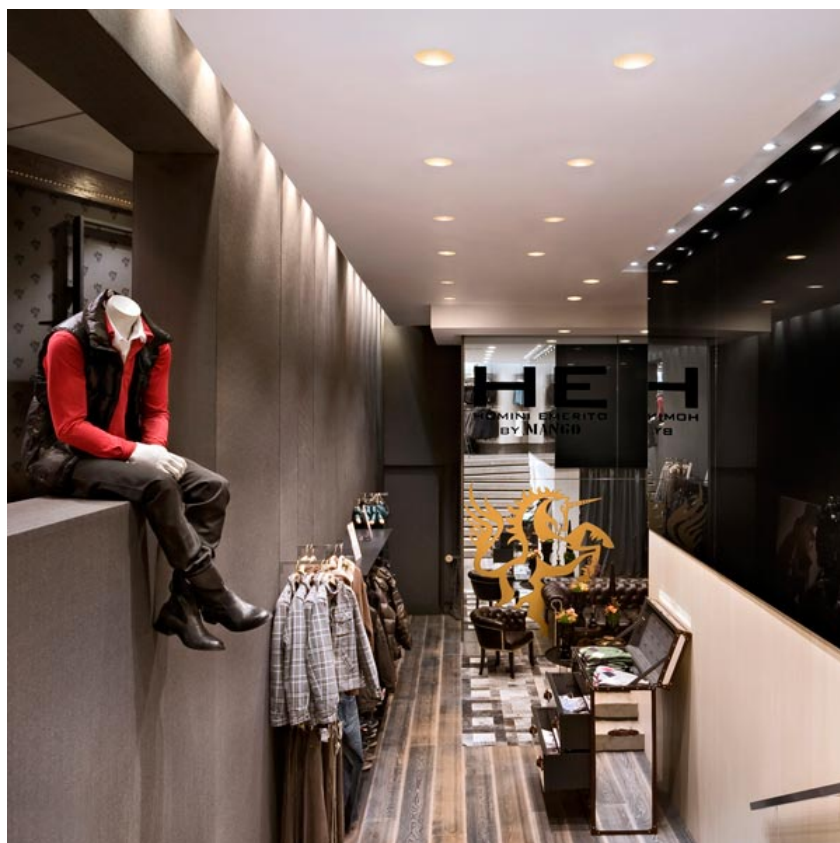

Kap Ø80 Fixed Optic Flood
designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included.

03.4533.GL - 617lm	Gold
03.4533.B1 - 643lm	White
03.4533.BU - 566lm	Blue
03.4533.74 - 559lm	Black
03.4533.CU - 607lm	Copper



CERTIFICATIONS



Kap Ø80 Fixed Optic Flood . Accessories

Power Supply



60.8534

Constant Current Power Supply for LED. 32W

Continuous current power supply of 32W, 230/240V - 50/60Hz with power current selected through adjustable 350/500/700 mA switch by trailing and leading edge dimming or push dimming.

Maximum length of 1.5 mm² secondary conductor (m): 10

Maximum length of 2.5 mm² secondary conductor (m): 15



60.8533

Constant Current Power Supply for LED. 25W

Continuous current power supply of 25W, 120-240V - 50/60Hz with power current selected through adjustable 350/500/700mA 1-10V switch or push dimming.

Maximum length of 1.5 mm² secondary conductor (m): 10

Maximum length of 2.5 mm² secondary conductor (m): 15



60.8847

Constant Current Power Supply for LED. 10-20W

Continuous current power supply of 10-20W, 110/240V - 50/60Hz with power current selected through adjustable 250/350/400/450/500/ 550/600/700 mA Dali switch. (Johnny 120 with accessories max 450 mA)

Maximum length of 1.5 mm² secondary conductor (m): 10


Maximum length of 2.5 mm² secondary conductor (m): 15



Kap Ø80 Fixed Optic Flood
designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included.

03.4533.GL - 617lm	Gold
03.4533.B1 - 643lm	White
03.4533.BU - 566lm	Blue
03.4533.74 - 559lm	Black
03.4533.CU - 607lm	Copper



60.8880

Constant Current Power Supply for LED. 6W-100/14W-240V

Continuous current power supply of 6W, 100V / 14W, 240V - 50/60Hz with 500 mA supply voltage.

Maximum length of 1.5 mm² secondary conductor (m): 50

Maximum length of 2.5 mm² secondary conductor (m): 50

CERTIFICATIONS



Kap Ø80 Fixed Optic Flood . Accessories

Mounting



08.9102.00

Installation frame No Trim



08.9100.00

Fast&Perfect tool ø126




Kap Ø80 Fixed Optic Flood
designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included.

03.4533.GL - 617lm	Gold
03.4533.BI - 643lm	White
03.4533.BU - 566lm	Blue
03.4533.74 - 559lm	Black
03.4533.CU - 607lm	Copper

Kap Ø80 Fixed Optic Flood . Lamps




LED Array

Lamp category:
LED

Socket:
Special base

Lamp type:
LED Array



CERTIFICATIONS

