

KAP 80 SURFACE SQUARE

Number of heads	1
Mounting	Ceiling surface
Lamps description	LED Array 9,2W 698 lm 2700K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	220/240
Environment	Indoor



OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	18° Spot

Kap 80 Surface Square

designed by FLOS Architectural

Luminaire for mounting on the ceiling with LED light source. Non-adjustable power source incorporated into luminaire body.



ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic
Emergency	Without
Insulation class	Class I

	03.6030.B1 - 692lm	White / White
	03.6030.14 - 692lm	Black / White
	03.6031.B1 - 684lm	White / Matt Gold
	03.6031.14 - 684lm	Black / Matt Gold
	03.6032.B1 - 664lm	White / Copper
	03.6032.14 - 664lm	Black / Copper
	03.6033.B1 - 625lm	White / Black
	03.6033.14 - 625lm	Black / Black
	03.6030.18 - 692lm	Deep Brown / White
	03.6031.18 - 684lm	Deep Brown / Gold
	03.6032.18 - 664lm	Deep Brown / Copper
	03.6033.18 - 625lm	Deep Brown / Black

PHYSICAL

Height (mm)	95
Construction material	Extruded aluminum
Weight (kg)	0,45

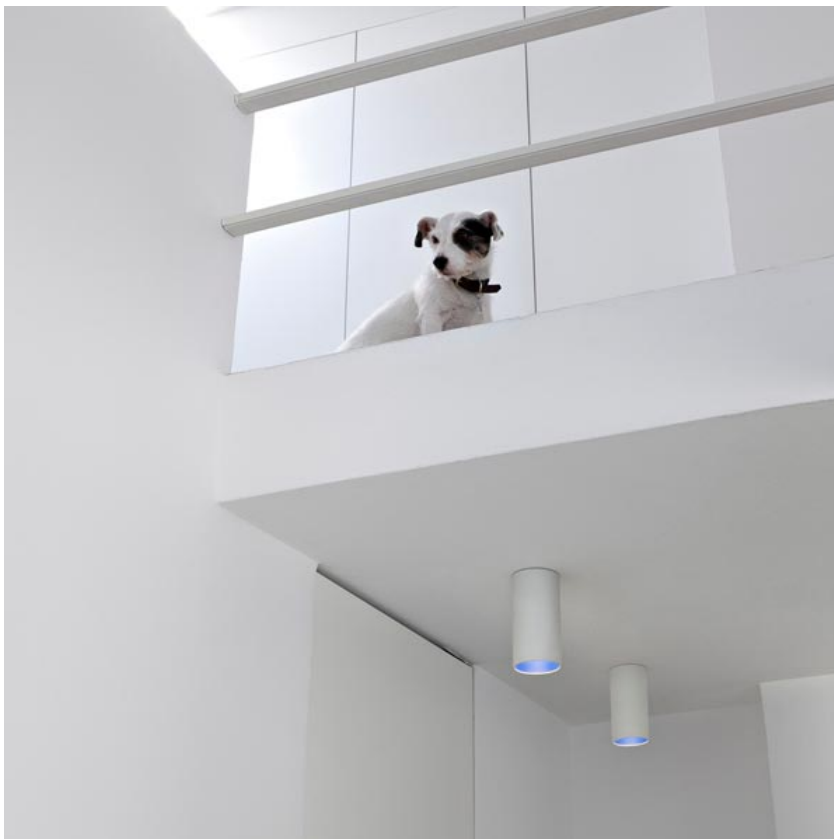

83

CERTIFICATIONS



Kap 80 Surface Square . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:


LED Array



Kap 80 Surface Square designed by FLOS Architectural

Luminaire for mounting on the ceiling with LED light source. Non-adjustable power source incorporated into luminaire body.

	03.6030.B1 - 692lm	White / White
	03.6030.I4 - 692lm	Black / White
	03.6031.B1 - 684lm	White / Matt Gold
	03.6031.I4 - 684lm	Black / Matt Gold
	03.6032.B1 - 664lm	White / Copper
	03.6032.I4 - 664lm	Black / Copper
	03.6033.B1 - 625lm	White / Black
	03.6033.I4 - 625lm	Black / Black
	03.6030.I8 - 692lm	Deep Brown / White
	03.6031.I8 - 684lm	Deep Brown / Gold
	03.6032.I8 - 664lm	Deep Brown / Copper
	03.6033.I8 - 625lm	Deep Brown / Black



CERTIFICATIONS

