

### **LIGHT TUBE DIRECT 900 MM**

**Number of heads** 

**Mounting** Track mounting

Top LED 25W/m 1818 lm 3000K CRI 90 Lamps description

Luminaire luminous flux See reference number

Voltage (V) 48 **Environment** Indoor

Notes

Turning fastening elements  $0^\circ$ - $90^\circ$  with a magnetic connection and mechanic security bock for a transversally installation between two lines of the profile. The Light Tube are only fed by one od the ends and do not communicate current through the other end.



**Aiming** Fixed Light distribution symmetry Symmetric Beam angle 145°

### **ELECTRICAL**


Transformer availability Separate item Transformer mounting Remote

Transformer type Electronic dimmable

**Emergency** Without

### **PHYSICAL**

900 Length (mm)

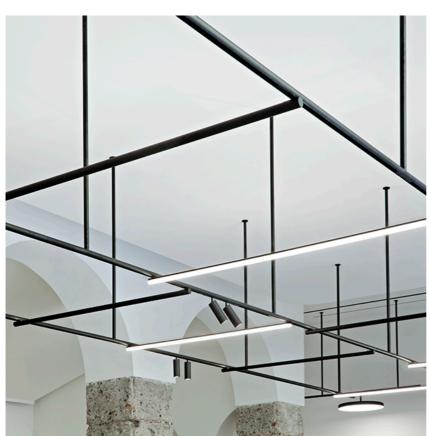




Light Tube Direct 900 mm designed by Vincent Van Duysen

Diffused LED light module to be installed in The Infra-Structure System.

03.6385.14 - 1671lm Black 03.6385.40 - 1671lm White



# **CERTIFICATIONS**









Flos.architectural@flos.com www.flos.com



## Light Tube Direct 900 mm . Lamps



**Top LED** 

Lamp category:

LED

Socket:

Special base

Lamp type:


Top LED



**Light Tube Direct 900 mm** designed by Vincent Van Duysen

Diffused LED light module to be installed in The Infra-Structure System.

03.6385.14 - 1671lm Black White



## **CERTIFICATIONS**







IP 20