

LIGHT TUBE DIRECT 1500 MM

Number of heads

Mounting Track mounting

Top LED 25W/m 2827 lm 3000K CRI 90 Lamps description

Luminaire luminous flux See reference number

Voltage (V) 48 **Environment** Indoor

Notes

Turning fastening elements 0° - 90° with a magnetic connection and mechanic security bock for a transversally installation between two lines of the profile. The Light Tube are only fed by one od the ends and do not communicate current through the other end.



Aiming Fixed Light distribution symmetry Symmetric Beam angle 145°




Transformer availability Separate item Transformer mounting Remote

Transformer type Electronic dimmable

Emergency Without

PHYSICAL

1500 Length (mm)

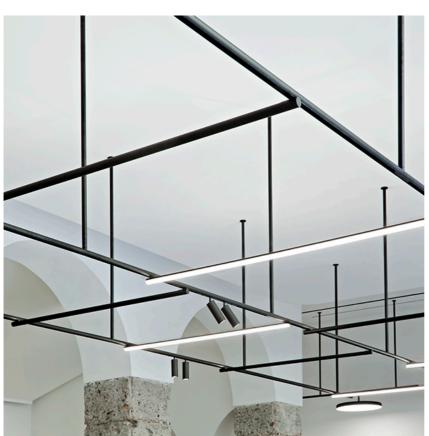




Light Tube Direct 1500 mm designed by Vincent Van Duysen

Diffused LED light module to be installed in The Infra-Structure System.

03.6387.14 - 2622lm Black 03.6387.40 - 2622lm White



CERTIFICATIONS









Flos.architectural@flos.com www.flos.com



Light Tube Direct 1500 mm . Lamps



Top LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Top LED



Light Tube Direct 1500 mm designed by Vincent Van Duysen

Diffused LED light module to be installed in The Infra-Structure System.

03.6387.14 - 2622lm Black 03.6387.40 - 2622lm White



CERTIFICATIONS







IP 20