

FLOS

LIGHT TUBE DIRECT 1500 MM

Number of heads	1
Mounting	Track mounting
Lamps description	Top LED 25W/m 2827 lm 2700K CRI 90
Luminaire luminous flux	See reference number
Voltage (V)	48
Environment	Indoor
Notes	Turning fastening elements 0°-90° with a magnetic connection and mechanic security lock for a transversally installation between two lines of the profile. The Light Tube are only fed by one of the ends and do not communicate current through the other end.



Light Tube Direct 1500 mm designed by Vincent Van Duysen

Diffused LED light module to be installed in The Infra-Structure System.

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	145°


ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic dimmable
Emergency	Without

● 03.6393.14 - 2330lm	Black
● 03.6393.40 - 2330lm	White

PHYSICAL

Length (mm)	1500
--------------------	------



CERTIFICATIONS



Light Tube Direct 1500 mm . Lamps



Top LED

Lamp category:
LED

Socket:
Special base


Lamp type:
Top LED



Light Tube Direct 1500 mm designed by Vincent Van Duysen

Diffused LED light module to be installed in The Infra-Structure System.

- | | | |
|---|---------------------|-------|
| ● | 03.6393.14 - 2330lm | Black |
| ● | 03.6393.40 - 2330lm | White |

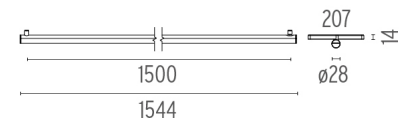

CERTIFICATIONS

